
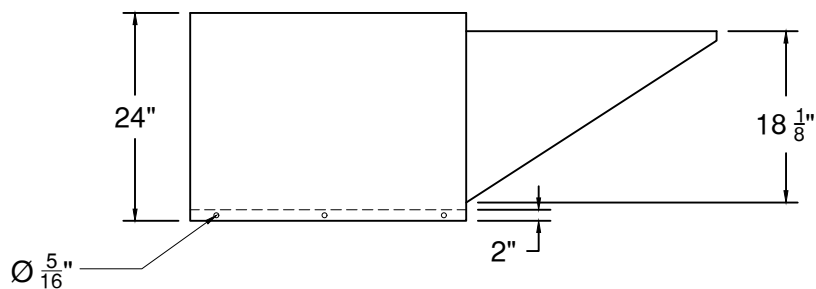



MODEL # SF5

UL705 FRESH AIR SUPPLY FAN BELT

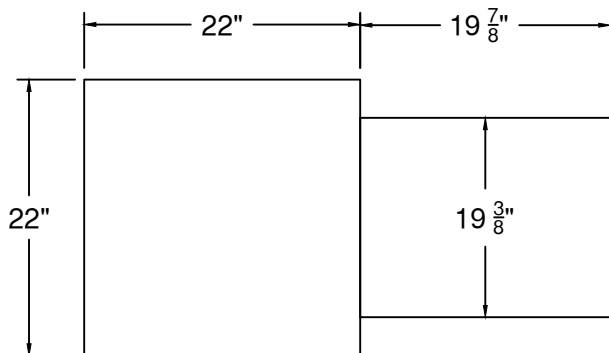

DIMENSIONAL DATA 21 1/2" SQ. CURB

PERFORMANCE DATA

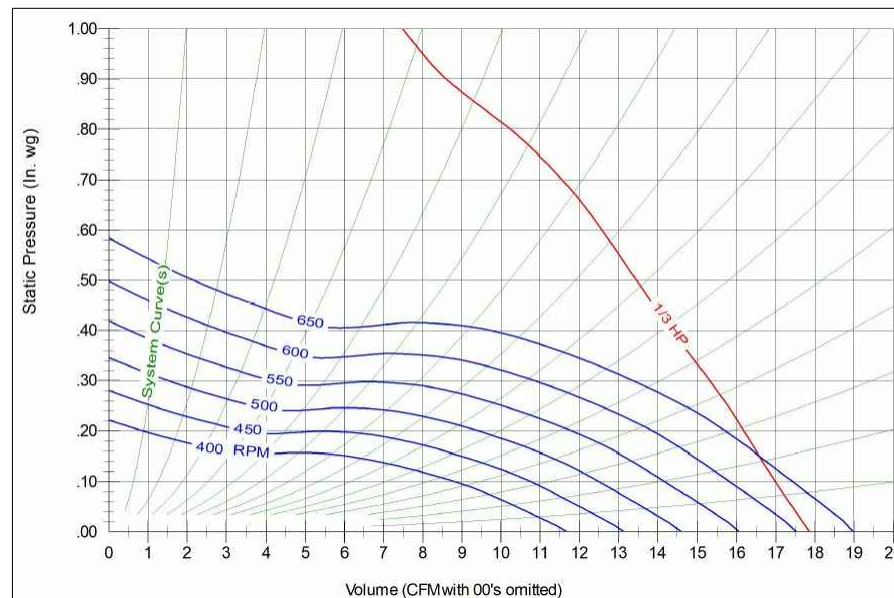

PHASE	1	VOLTS	115/230
AMPS	7.2/3.6	HP	1/3

RPM	0"		.125"		.250"		.375"		.5"		.750"		1"	
	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE
440	1289	6.8	955	5.4										
490	1430	8	1158	6.7										
540	1585	9.5	1330	8.1	930	7.2								
585	1727	11	1500	9.6	1212	8.7								

STANDARD FEATURES

FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
OPERATE AT LOW SPEED AND LOW NOISE LEVELS
GALVANIZED STEEL HOUSING
HEAVY DUTY BALL BEARINGS SUITABLE FOR -65° TO +250° F
WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD
AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT
EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL
SEPARATION WHERE NECESSARY
AVERAGE UNIT WEIGHT: 122 LBS
AVERAGE SHIPPING WEIGHT: 133 LBS

