

## Grease Duct Spec

**Model:**

**DW-NAKS-CK-RC-KIT10**

**Double Wall 16" Vertical**



- 2x J-600 Sealant
- 1x DW-NAKS-CK16-LSB-RC Light Support Band
- 1x DW-NAKS-CK16-APS-RC Anchor Plate Support
- 1x DW-NAKS-CK16-24L-RC 24" Fixed Length
- 1x DW-NAKS-CK16-24CL-RC 24" Cut Length
- 2x DW-NAKS-CK16-48L-RC 48" Fixed Length
- 1x DW-NAKS-CK16-NWHO-RC No-Weld Hood Adapter - Oval
- 1x DW-NAKS-CK16-FPE:29x29-RC Fan Plate Adapter - End





Vent Diameter	Number of Joints Per 10 oz. Tube
3" - 6"	6.7
8" - 10"	6
11" - 12"	5.3
13" - 16"	4.7
18" - 20"	4
22" - 24"	3.3
26" - 28"	2.7
30" - 32"	2
34" - 36"	1.3
38" - 48"	0.7


	drawn by	model	code	description
	JJR	ALL	J-600	J-600 Sealant

Ø	6	7	8	9	10	11	12	13	14	16
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
lb	1.63	1.78	1.94	2.11	2.27	2.42	2.57	2.73	2.90	3.21

Ø	18	20	22	24	26	28	30	32	34	36
B	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
lb	3.52	3.85	4.16	4.49	4.80	5.13	5.43	5.74	6.07	6.38

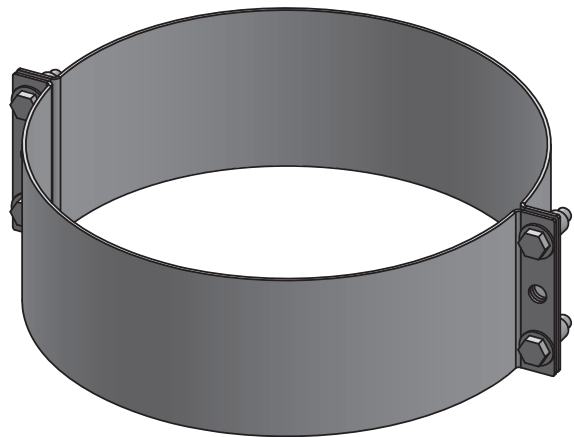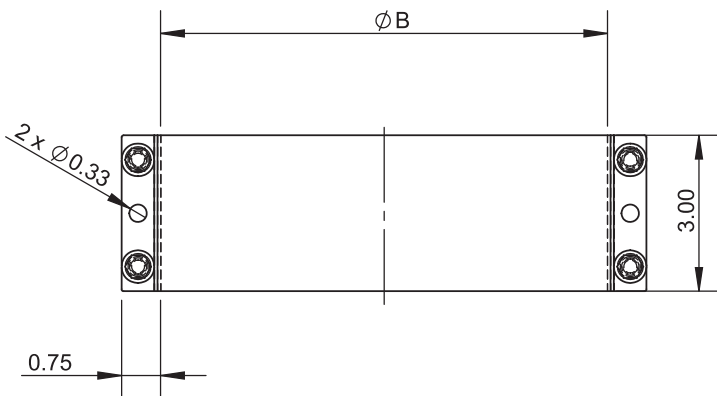


	drawn by	model	code	description
	JJR	DW-NAKS-CK-RC	LSB	DW-NAKS-CKØ-LSB-RC Light Support Band

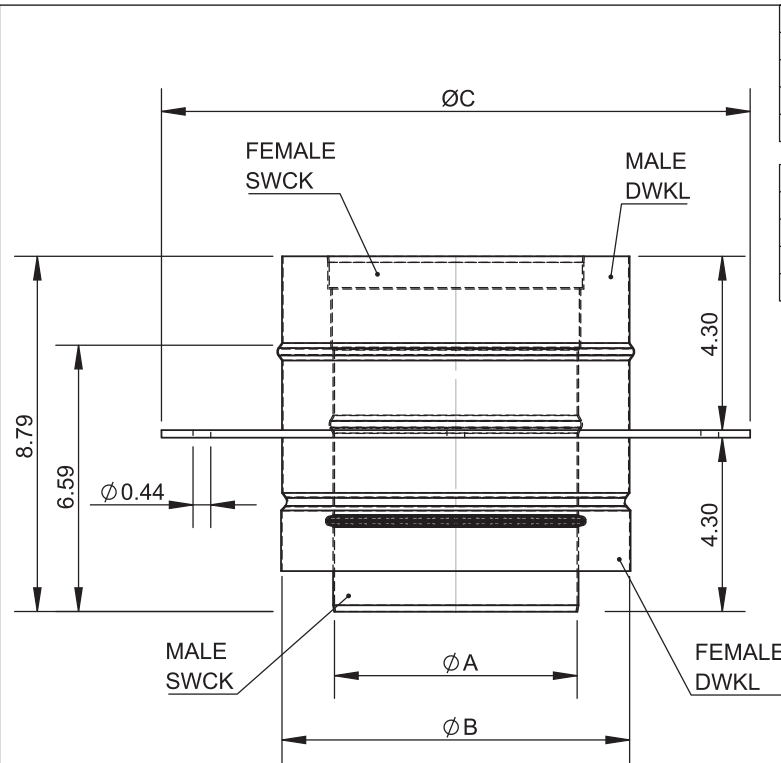


Ø	6	7	8	9	10	11	12	13	14	16
A	6	7	8	9	10	11	12	13	14	16
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
C	14.56	15.56	16.56	17.56	18.56	19.56	20.56	21.56	22.56	24.56
lb	14.39	16.06	17.73	19.45	21.16	22.92	24.62	26.42	28.23	31.94

Ø	18	20	22	24	26	28	30	32	34	36
A	18	20	22	24	26	28	30	32	34	36
B	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
C	26.56	28.56	30.56	32.56	34.56	36.56	38.56	40.56	42.56	44.56
lb	35.71	39.60	43.54	51.44	55.86	60.41	65.01	69.74	74.51	79.44

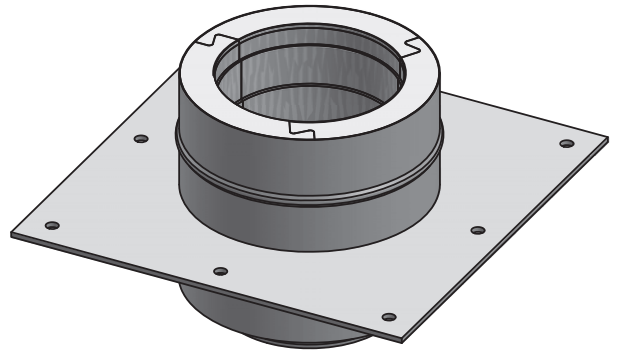


\*INCLUDES 1 LOCKING BAND

drawn by	model	code	description
JJR	DW-NAKS-CK-RC	APS	DW-NAKS-CKØ-APS-RC Anchor Plate Support

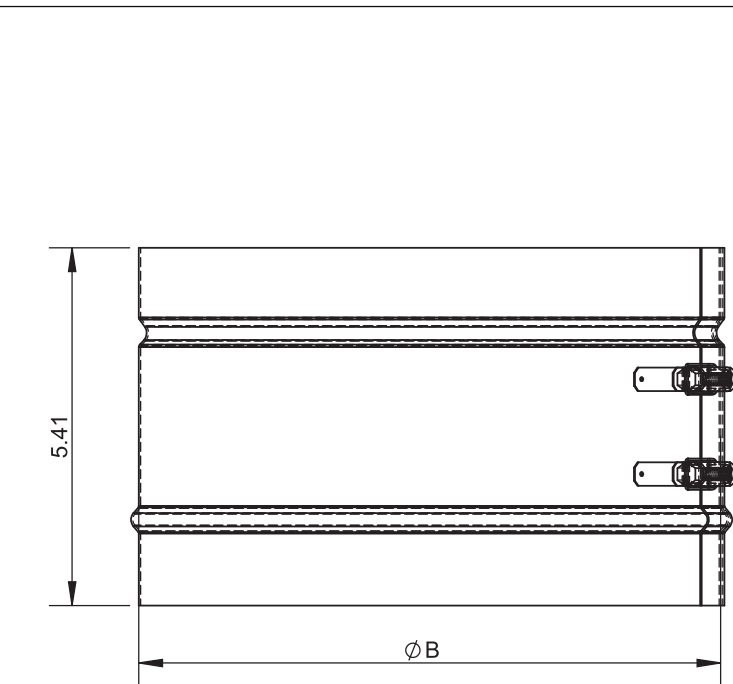


Ø	6	7	8	9	10	11	12	13	14	16
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
lb	1.25	1.39	1.52	1.65	1.76	1.89	2.00	2.16	2.27	2.53

Ø	18	20	22	24	26	28	30	32	34	36
B	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
lb	2.77	3.04	3.26	3.54	3.76	4.05	4.27	4.55	4.77	5.04

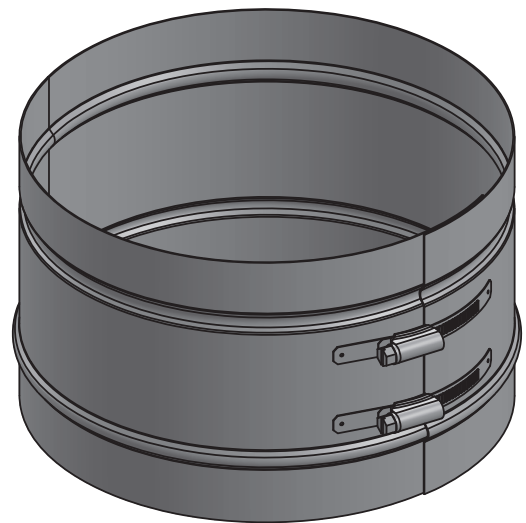

drawn by	model	code	description
JJR	DW-NAKS-CK-RC	LB	DW-NAKS-CKØ-LB-RC Locking Band

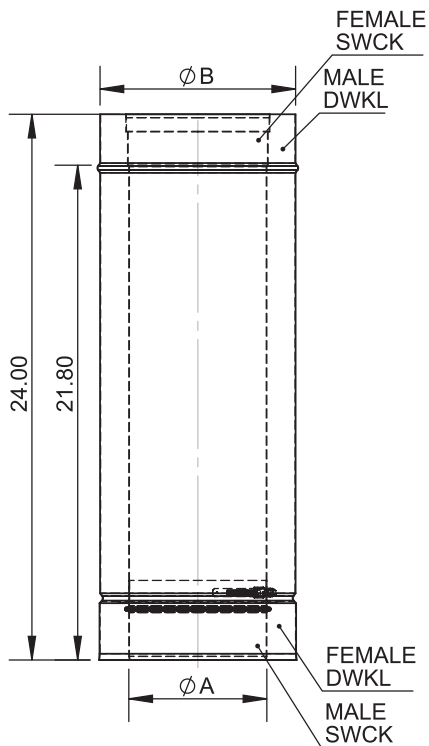

Ø	6	7	8	9	10	11	12	13	14	16
A	6	7	8	9	10	11	12	13	14	16
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
lb	12.52	14.21	15.86	17.53	19.18	20.88	22.53	24.20	25.85	29.19


  

Ø	18	20	22	24	26	28	30	32	34	36
A	18	20	22	24	26	28	30	32	34	36
B	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
lb	32.52	35.86	39.18	53.48	57.66	61.89	66.04	70.27	74.45	78.67



\*FLANGE SUPPORT BAND INCLUDED  
ON SIZED 14" AND ABOVE  
\*INCLUDES 1 LOCKING BAND

		drawn by	model	code	description
		DAR	DW-NAKS-CK-RC	24L	DW-NAKS-CKØ-24L-RC 24" Fixed Length

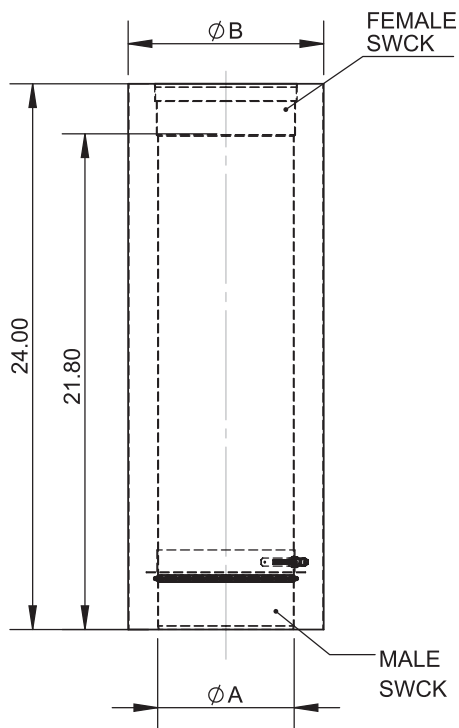

Ø	6	7	8	9	10	11	12	13	14	16
A	6	7	8	9	10	11	12	13	14	16
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
lb	16.76	18.94	21.08	23.25	25.41	27.57	29.72	31.88	34.03	38.37

Ø	18	20	22	24	26	28	30	32	34	36
A	18	20	22	24	26	28	30	32	34	36
B	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
lb	42.66	46.99	51.28	72.31	77.88	83.53	89.10	94.75	100.32	105.97




\*FLANGE SUPPORT BAND INCLUDED  
ON SIZES 14" AND ABOVE  
\*INCLUDES 1 CUT LENGTH LOCKING BAND

		drawn by	model	code	description
		JJR	DW-NAKS-CK-RC	24CL	DW-NAKS-CKØ-24CL-RC 24" Cut Pipe Length

Ø	6	7	8	9	10	11	12
A	6	7	8	9	10	11	12
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5
lb	24.05	27.30	30.54	33.79	37.03	40.28	43.52


Ø	13	14	16	18	20	22	24
A	13	14	16	18	20	22	24
B	15.5	16.5	18.5	20.5	22.5	24.5	26.5
lb	46.77	49.35	56.83	63.32	69.81	76.27	104.54

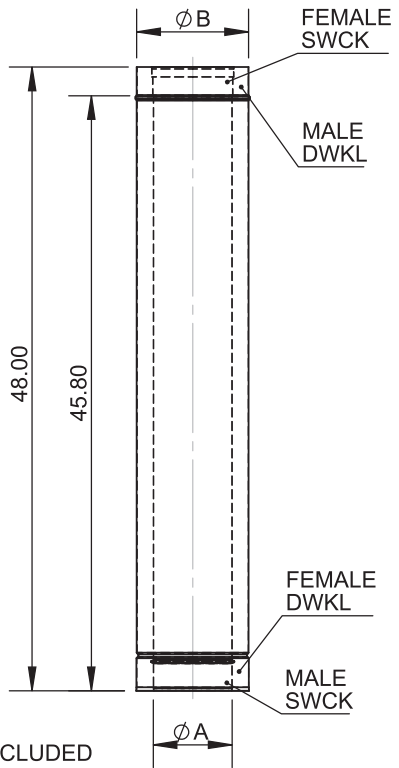



\*FLANGE SUPPORT BAND INCLUDED ON SIZES 14" AND ABOVE

\*INCLUDES 1 LOCKING BAND



		drawn by	CLS	model	DW-NAKS-CK-RC	code	48L	description	DW-NAKS-CKØ-48L-RC 48" Fixed Length
--	--	----------	-----	-------	---------------	------	-----	-------------	-------------------------------------

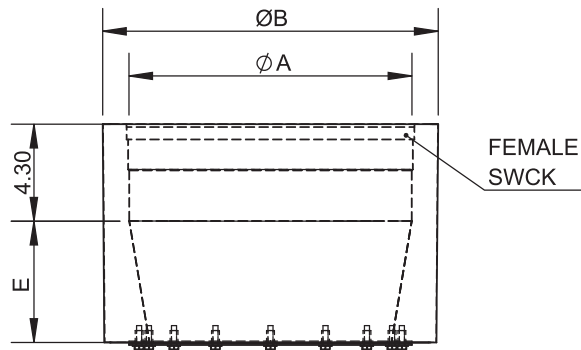

Ø	14	16	18	20
A	14	16	18	20
B	16.5	18.5	20.5	22.5
C	12			
D	16.35	21.3	26.25	31.2
E	7	10	13	16
n	18	18	22	22
lb	17.16	24.29	32.65	41.98

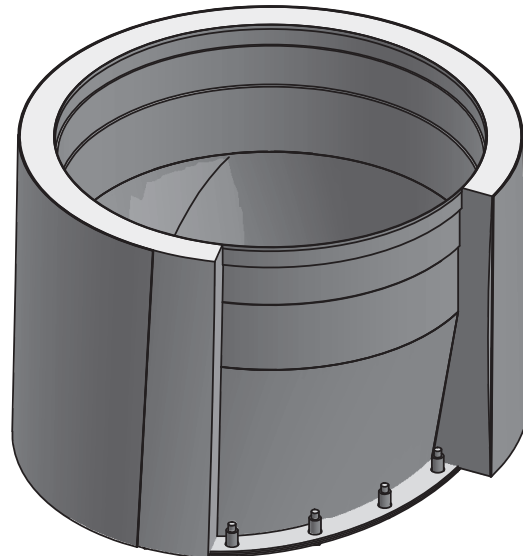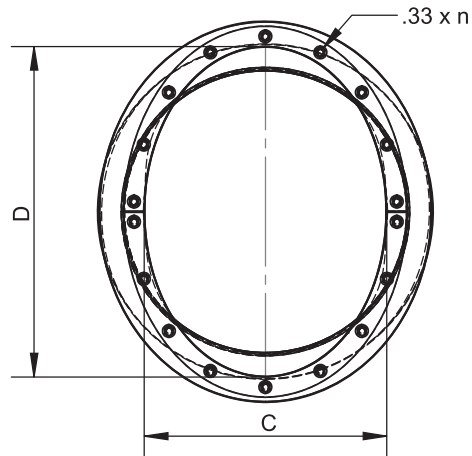


		drawn by	JJR	model	DW-NAKS-CK-RC	code	NWHO	description	DW-NAKS-CKØ-NWHO-RC No Weld Hood Adapter Oval - Start
--	--	----------	-----	-------	---------------	------	------	-------------	---

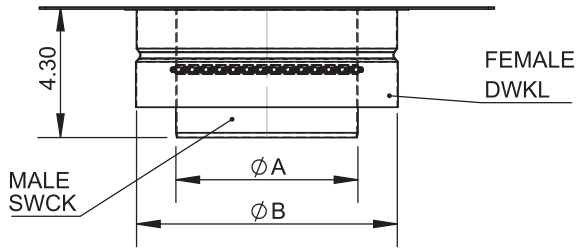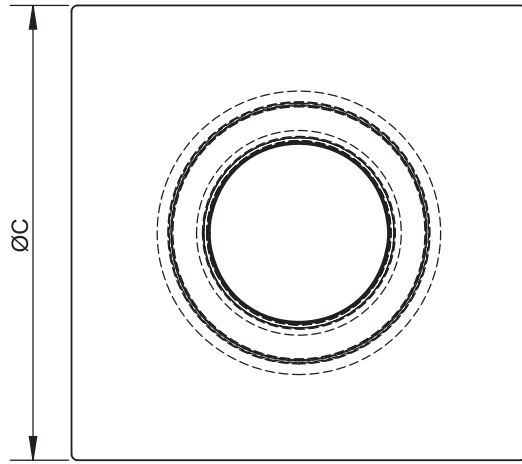

\*INCLUDES 1 LOCKING BAND

<b>Ø</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>16</b>
<b>A</b>	6	7	8	9	10	11	12	13	14	16
<b>B</b>	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
<b>C</b>	29									
<b>lb</b>	17.29	17.47	17.60	17.73	17.82	17.89	17.91	17.93	17.89	17.78

<b>Ø</b>	<b>18</b>	<b>20</b>	<b>22</b>	<b>24</b>	<b>26</b>	<b>28</b>	<b>30</b>	<b>32</b>	<b>34</b>	<b>36</b>
<b>A</b>	18	20	22	24	26	28	30	32	34	36
<b>B</b>	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
<b>C</b>	36					42			48	
<b>lb</b>	25.56	25.23	24.75	26.09	33.81	33.18	32.41	41.12	40.11	39.05

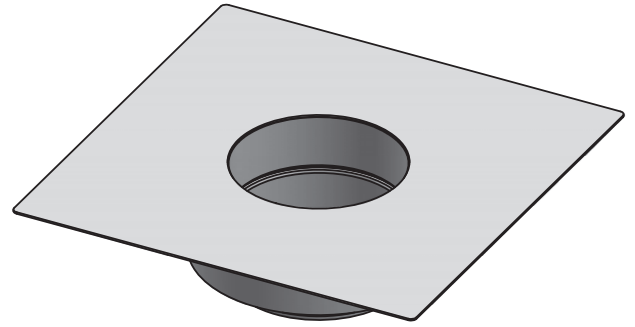

		drawn by JJR	model DW-NAKS-CK-RC	code FPE	description <b>DW-NAKS-CKØ-FPE-RC Fan Plate Adapter - End</b>
--	--	-----------------	------------------------	-------------	--