

Next-Generation Hanging Ventless Hood System

Install a Commercial Hood with Fire System Anywhere

NO DUCTWORK 🇺🇸 **NO ROOF WORK** 🇺🇸 **NO DELAYS**

The **NAKS Hanging Oven Ventless Hood** delivers **Type I grease and smoke capture** for electric ovens: convection, conveyor, pizza ovens, popcorn machines and rotisseries with Ansul fire protection.

Designed for modern, space-constrained environments, this system enables commercial cooking in multi-story buildings, urban locations, and retrofit spaces, installed as an island hood or a wall hood.

- **Reduce HVAC costs** versus traditional ducted exhaust
- No duct cleaning bills. **Affordable and predictable filter costs**
- Avoid ventilation delays with fast 5-7 business day shipping (business days from order approval date)
- Triple filter technology traps grease particles, eliminates condensation, and **reduces cooking odors**



IMPORTANT!

ONLY FOR USE WITH ELECTRICAL APPLIANCES



Convection Ovens

Temperature Max: 550°F



Deck Ovens

Temperature Max: 550°F



Combination Ovens

Temperature Max: 550°F



**ELECTRICAL
EQUIPMENT ONLY!**

Temperature Max: 550°F



Baking Ovens

Temperature Max: 550°F



Rotisseries

Temperature Max: 550°F



Popcorn Machines

Temperature Max: 550°F



Conveyor Ovens

Temperature Max: 550°F

Contact us for Quote Requests, Support, or All Other Inquiries



Phone:
(855) 853-9619




Email:
sales@naksinc.com



Text:
(206) 690-8429

Solve Ventilation Challenges Instantly

Easy-to-Install Ventless Hood Systems that Don't Require Roof Fans or Expensive Ductwork

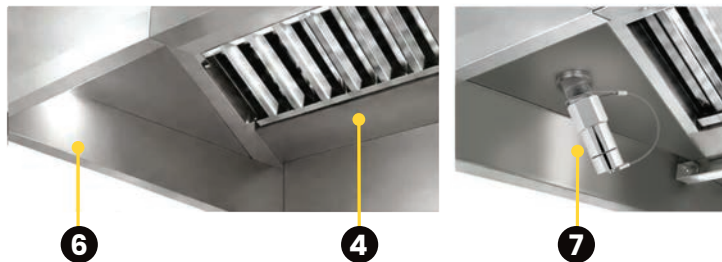

- 1 Easy-Open Fire Door** – Durable, easy-access door for quick inspection and simplified maintenance.
- 2 Optional Skirt** – Skirt is available based on dedicated space; installed in the field for a clean, finished look.
- 3 Convenient Power Switch** – On/Off switch for easy control and added safety.
- 4 Replaceable Grease Filters** – High-efficiency baffle filters are removable for fast cleaning and long-lasting performance.
- 5 Safety Cage With Ventilated Perimeter and Access Opening** – Protects internal components while ensuring proper airflow and easy access.
- 6 LED Lighting** – LED lighting for increased visibility of cooking surface.
- 7 Ansul Fire Suppression Nozzle** – Pre-installed Ansul nozzle for automatic fire protection and code compliance.

HOOD MODEL	36" ISLAND	36" WALL	48" ISLAND	48" WALL
HOOD LENGTH	36"	36"	48"	48"
HOOD DEPTH	42"	42"	42"	42"
MINIMUM HOOD OVERHANG RIGHT AND LEFT	7.5"	7.5"	7.5"	7.5"
MINIMUM FRONT OVERHANG	15"	15"	15"	15"
SKIRT LENGTH	48"	48"	60"	60"
SKIRT DEPTH	54"	48"	48"	48"
MAX DISTANCE ABOVE OVEN	4"	4"	4"	4"
MAX DISTANCE TO LOWEST OPENING	36"	36"	36"	36"
SIZE OF COOKING DOOR OPENING	33"	33"	40"	40"
OVERALL HEIGHT	36"	36"	36"	36"



18-gauge stainless steel with universal ceiling mount and skirt

Contact us for Quote Requests, Support, or All Other Inquiries



Phone:
(855) 853-9619



Email:
sales@naksinc.com



Text:
(206) 690-8429