



## Grease Duct Spec

**Model:**  
**SW-NAKS-CK-KIT13**  
**Single Wall 18" Vertical**


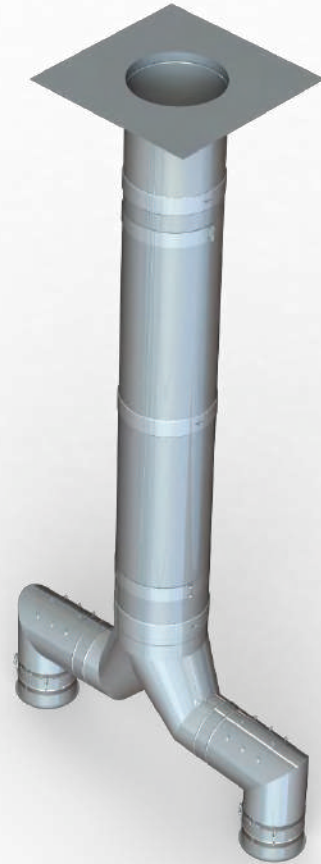


- 3x J-600 Sealant
- 2x SW-NAKS-CK18-LSB Light Support Band
- 2x SW-NAKS-CK12-CLB Cut Length Band
- 1x SW-NAKS-CK18-CLB Cut Length Band
- 2x SW-NAKS-CK12-24L 24" Fixed Length
- 1x SW-NAKS-CK18-24L 24" Fixed Length
- 2x SW-NAKS-CK18-48L 48" Fixed Length
- 2x SW-NAKS-CK12-87EA 87 Degree Elbow w/ Access
- 1x SW-NAKS-CK18-87BHT12 87 Degree Reduction Bull-Head Tee
- 2x SW-NAKS-CK12-NWHA No-Weld Hood Adapter
- 1x SW-NAKS-CK18-FPE:36X36 Fan Plate Adapter - End

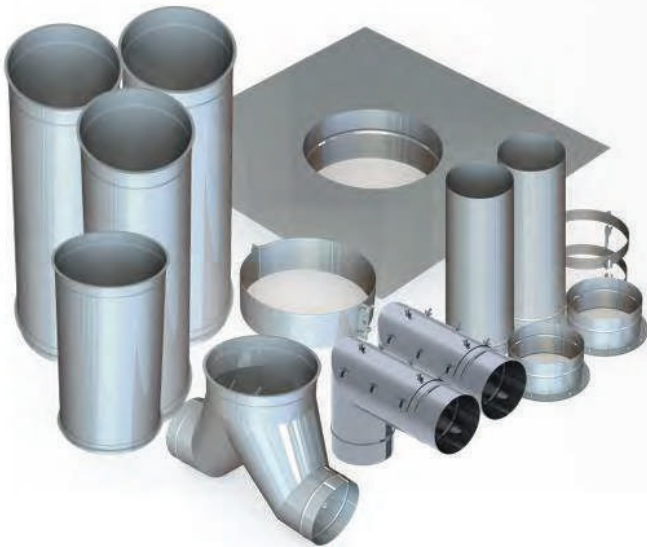

|    |      |      |      |      |      |      |      |      |      |      |
|----|------|------|------|------|------|------|------|------|------|------|
| Ø  | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   |
| A  | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   |
| lb | 1.23 | 1.39 | 1.54 | 1.69 | 1.87 | 2.02 | 2.18 | 2.33 | 2.49 | 2.82 |

|    |      |      |      |      |      |      |      |      |      |      |
|----|------|------|------|------|------|------|------|------|------|------|
| Ø  | 18   | 20   | 22   | 24   | 26   | 28   | 30   | 32   | 34   | 36   |
| A  | 18   | 20   | 22   | 24   | 26   | 28   | 30   | 32   | 34   | 36   |
| lb | 3.12 | 3.45 | 3.76 | 4.09 | 4.40 | 4.71 | 5.04 | 5.35 | 5.68 | 5.98 |

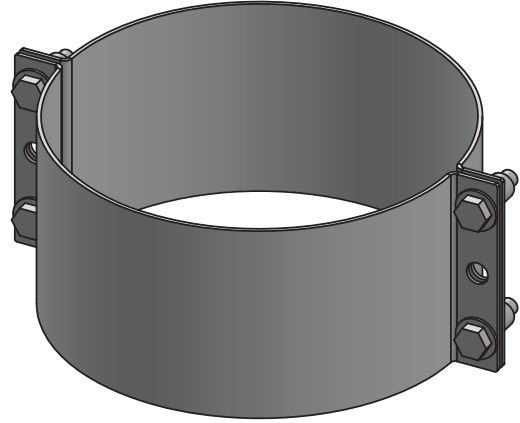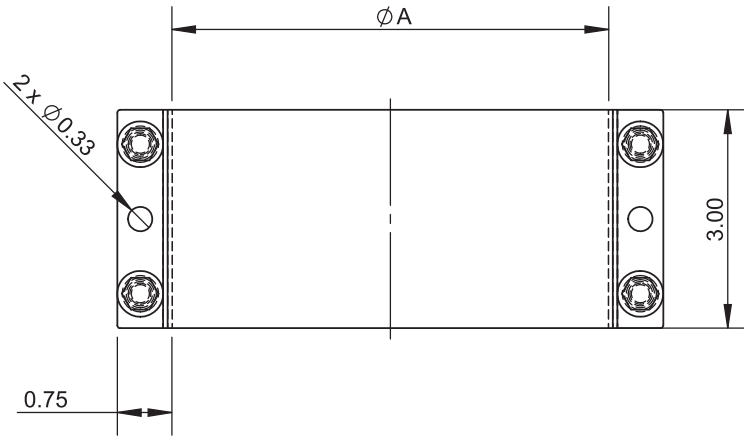

|  |  |          |            |      |                               |
|--|--|----------|------------|------|-------------------------------|
|  |  | drawn by | model      | code | description                   |
|  |  | JJR      | SW-NAKS-CK | LSB  | SW-NAKS-CKØ-LSB Light Support |





| Vent Diameter | Number of Joints Per 10 oz. Tube |
|---------------|----------------------------------|
| 3" - 6"       | 6.7                              |
| 8" - 10"      | 6                                |
| 11" - 12"     | 5.3                              |
| 13" - 16"     | 4.7                              |
| 18" - 20"     | 4                                |
| 22" - 24"     | 3.3                              |
| 26" - 28"     | 2.7                              |
| 30" - 32"     | 2                                |
| 34" - 36"     | 1.3                              |
| 38" - 48"     | 0.7                              |

|  |  |          |       |       |               |
|--|--|----------|-------|-------|---------------|
|  |  | drawn by | model | code  | description   |
|  |  | JJR      | ALL   | J-600 | J-600 Sealant |

| Ø  | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   |
|----|------|------|------|------|------|------|------|------|------|------|
| A  | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   |
| lb | 0.35 | 0.42 | 0.46 | 0.51 | 0.55 | 0.59 | 0.64 | 0.68 | 0.75 | 0.84 |



| Ø  | 18   | 20   | 22   | 24   | 26   | 28   | 30   | 32   | 34   | 36   |
|----|------|------|------|------|------|------|------|------|------|------|
| A  | 18   | 20   | 22   | 24   | 26   | 28   | 30   | 32   | 34   | 36   |
| lb | 0.92 | 1.01 | 1.12 | 1.21 | 1.30 | 1.41 | 1.50 | 1.58 | 1.69 | 1.78 |

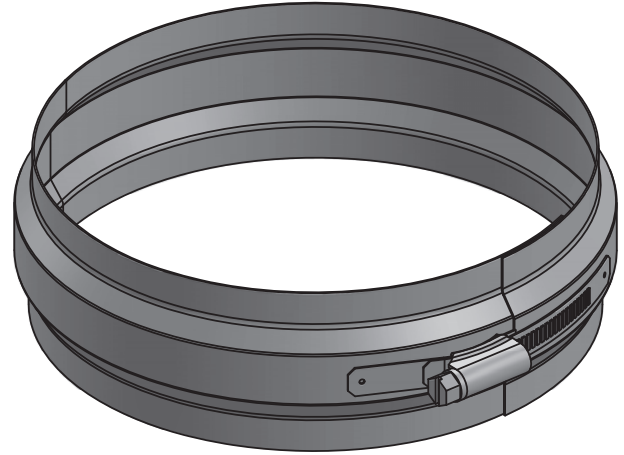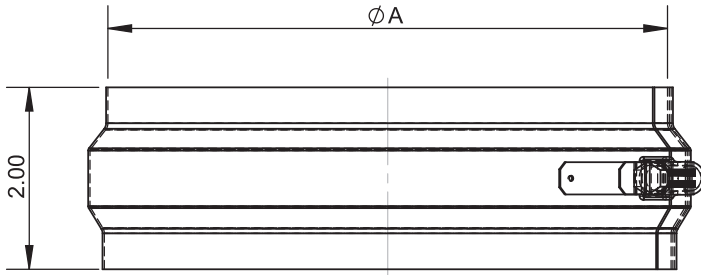


|  |  |                 |                     |            |   |
|--|--|-----------------|---------------------|------------|---|
|  |  | drawn by<br>JJR | model<br>SW-NAKS-CK | code<br>LB | description<br><b>SW-NAKS-CKØ-LB Locking Band</b> |
|--|--|-----------------|---------------------|------------|---|

| Ø  | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   |
|----|------|------|------|------|------|------|------|------|------|------|
| A  | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   |
| lb | 0.59 | 0.68 | 0.75 | 0.84 | 0.92 | 1.01 | 1.08 | 1.17 | 1.23 | 1.43 |

| Ø  | 18   | 20   | 22   | 24   | 26   | 28   | 30   | 32   | 34   | 36   |
|----|------|------|------|------|------|------|------|------|------|------|
| A  | 18   | 20   | 22   | 24   | 26   | 28   | 30   | 32   | 34   | 36   |
| lb | 1.56 | 1.74 | 1.89 | 2.07 | 2.22 | 2.40 | 2.53 | 2.73 | 2.86 | 3.06 |

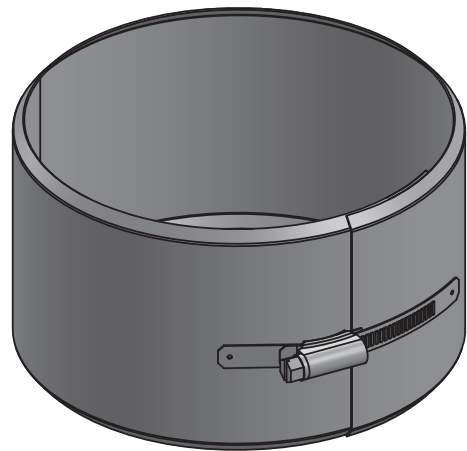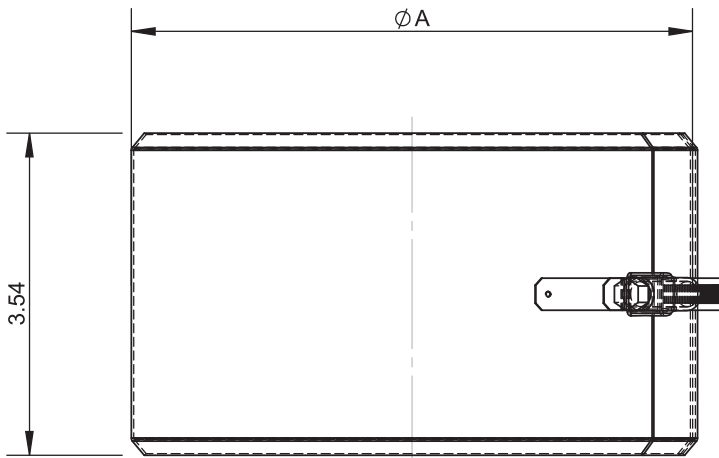

|  |  |                 |                     |             |   |
|--|--|-----------------|---------------------|-------------|---|
|  |  | drawn by<br>JJR | model<br>SW-NAKS-CK | code<br>CLB | description<br><b>SW-NAKS-CKØ-CLB Cut Length Locking Band</b> |
|--|--|-----------------|---------------------|-------------|---|

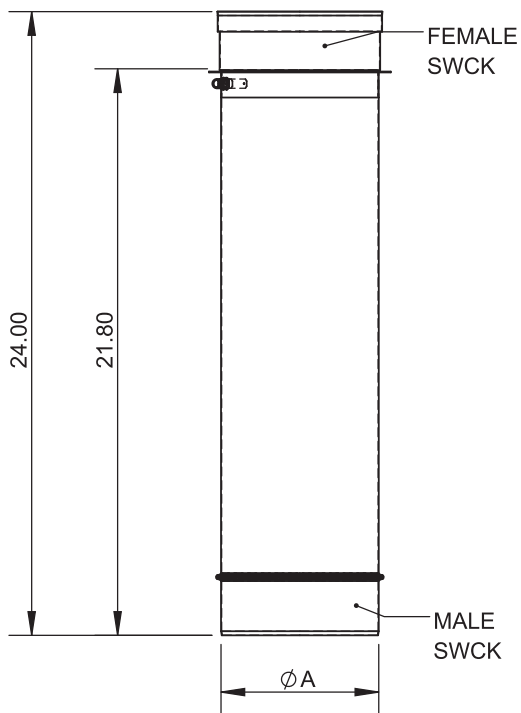

| Ø  | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   |
|----|------|------|------|------|------|------|------|------|------|------|
| A  | 6    | 7    | 8    | 9    | 10   | 11   | 12   | 13   | 14   | 16   |
| lb | 3.67 | 4.27 | 4.86 | 5.46 | 6.05 | 6.64 | 7.22 | 7.81 | 8.40 | 9.59 |


| Ø  | 18    | 20    | 22    | 24    | 26    | 28    | 30    | 32    | 34    | 36    |
|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| A  | 18    | 20    | 22    | 24    | 26    | 28    | 30    | 32    | 34    | 36    |
| lb | 10.78 | 11.97 | 13.16 | 19.58 | 21.21 | 22.81 | 24.44 | 26.07 | 27.70 | 29.30 |



\*FLANGE SUPPORT BAND INCLUDED  
ON SIZES 14" AND ABOVE

\*INCLUDES 1 LOCKING BAND

|  |  |          |     |       |            |      |     |             |   |  |
|--|--|----------|-----|-------|------------|------|-----|-------------|---|--|
|  |  | drawn by | JJR | model | SW-NAKS-CK | code | 24L | description | <b>SW-NAKS-CKØ-24L 24" Fixed Length</b> |  |
|--|--|----------|-----|-------|------------|------|-----|-------------|---|--|

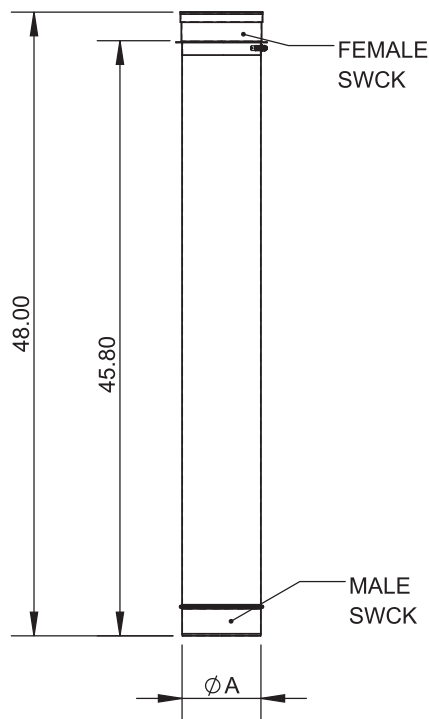

| Ø  | 6    | 7    | 8    | 9     | 10    | 11    | 12    |
|----|------|------|------|-------|-------|-------|-------|
| A  | 6    | 7    | 8    | 9     | 10    | 11    | 12    |
| lb | 6.93 | 8.05 | 9.17 | 10.32 | 11.44 | 12.58 | 13.71 |


| Ø  | 13    | 14    | 16    | 18    | 20    | 22    | 24    |
|----|-------|-------|-------|-------|-------|-------|-------|
| A  | 13    | 14    | 16    | 18    | 20    | 22    | 24    |
| lb | 14.83 | 15.97 | 18.24 | 20.48 | 22.75 | 25.01 | 37.69 |



\*FLANGE SUPPORT BAND INCLUDED  
ON SIZES 14" AND ABOVE


\*INCLUDES 1 LOCKING BAND

|  |  |          |     |       |            |      |     |             |   |  |
|--|--|----------|-----|-------|------------|------|-----|-------------|---|--|
|  |  | drawn by | JJR | model | SW-NAKS-CK | code | 48L | description | <b>SW-NAKS-CKØ-48L 48" Fixed Length</b> |  |
|--|--|----------|-----|-------|------------|------|-----|-------------|---|--|

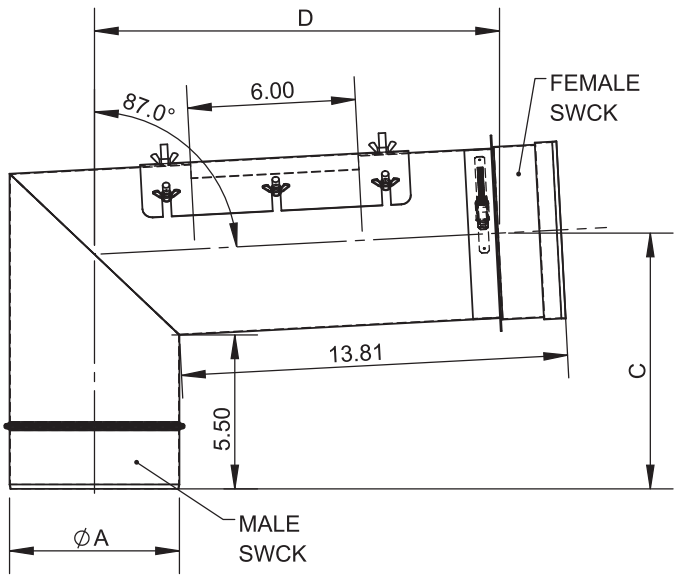


| Ø  | 6     | 7     | 8     | 9     | 10    | 11    | 12    | 13    | 14    | 16    |
|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| A  | 6     | 7     | 8     | 9     | 10    | 11    | 12    | 13    | 14    | 16    |
| C  | 9.14  | 9.64  | 10.14 | 10.64 | 11.14 | 11.64 | 12.13 | 12.63 | 13.13 | 14.14 |
| D  | 14.47 | 14.95 | 15.42 | 15.89 | 16.37 | 16.84 | 17.32 | 17.79 | 18.26 | 19.22 |
| lb | 4.27  | 5.04  | 5.85  | 6.69  | 7.66  | 8.58  | 9.57  | 10.58 | 11.66 | 19.07 |

| Ø  | 18    | 20    | 22    | 24    | 26    | 28    | 30    | 32    | 34    | 36    |
|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| A  | 18    | 20    | 22    | 24    | 26    | 28    | 30    | 32    | 34    | 36    |
| C  | 15.14 | 16.13 | 17.13 | 18.13 | 19.13 | 20.13 | 21.13 | 22.13 | 23.12 | 24.12 |
| D  | 20.16 | 21.11 | 22.06 | 23.01 | 23.95 | 24.9  | 25.85 | 26.8  | 27.74 | 28.69 |
| lb | 22.44 | 26.16 | 29.99 | 34.06 | 38.46 | 42.99 | 47.78 | 52.93 | 58.19 | 64.53 |

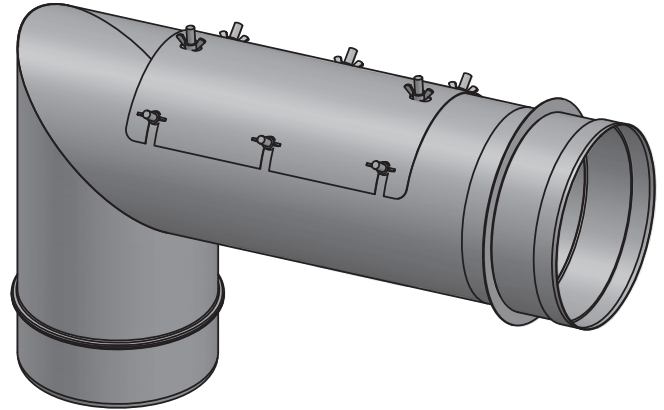


\*FLANGE SUPPORT BAND INCLUDED  
ON SIZES 14" AND ABOVE  
\*INCLUDES 1 LOCKING BAND

|  |  |          |     |       |            |      |      |             |   |  |
|--|--|----------|-----|-------|------------|------|------|-------------|---|--|
|  |  | drawn by | JJR | model | SW-NAKS-CK | code | 87EA | description | <b>SW-NAKS-CKØ-87EA 87 Elbow Access</b> |  |
|--|--|----------|-----|-------|------------|------|------|-------------|---|--|

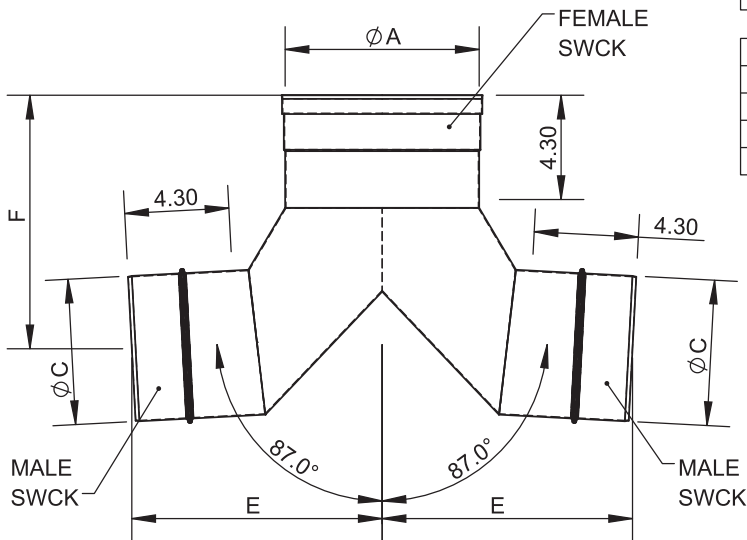


| Ø | 6                  | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 16 |
|---|--------------------|---|---|---|----|----|----|----|----|----|
| A | 6                  | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 16 |
| C | Customer Dimension |   |   |   |    |    |    |    |    |    |
| E | Customer Dimension |   |   |   |    |    |    |    |    |    |
| F | Customer Dimension |   |   |   |    |    |    |    |    |    |

| Ø | 18                 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 34 | 36 |
|---|--------------------|----|----|----|----|----|----|----|----|----|
| A | 18                 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 34 | 36 |
| C | Customer Dimension |    |    |    |    |    |    |    |    |    |
| E | Customer Dimension |    |    |    |    |    |    |    |    |    |
| F | Customer Dimension |    |    |    |    |    |    |    |    |    |

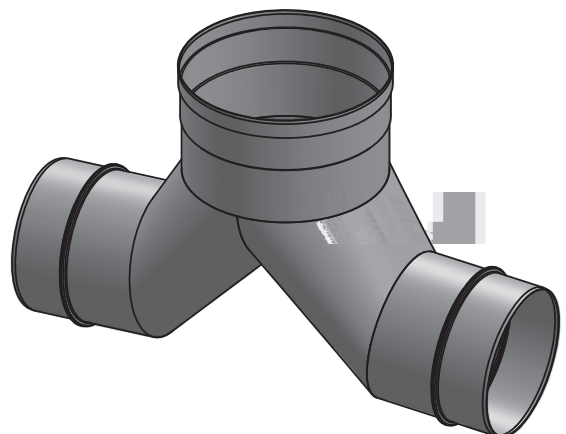


\*INCLUDES 2 LOCKING BANDS


|  |  |          |     |       |            |      |       |             |  |  |
|--|--|----------|-----|-------|------------|------|-------|-------------|--|--|
|  |  | drawn by | JJR | model | SW-NAKS-CK | code | 87BHT | description | <b>SW-NAKS-CKØ-87BHT 87 Degree Bull Head Tee</b> |  |
|--|--|----------|-----|-------|------------|------|-------|-------------|--|--|

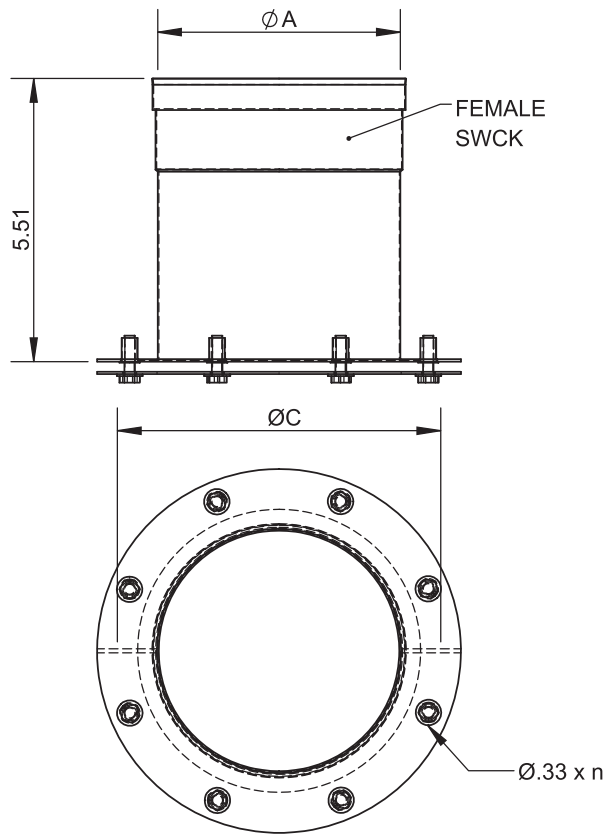

|    |      |      |       |       |       |       |       |  |  |  |
|----|------|------|-------|-------|-------|-------|-------|--|--|--|
| Ø  | 6    | 7    | 8     | 9     | 10    | 11    | 12    |  |  |  |
| A  | 6    | 7    | 8     | 9     | 10    | 11    | 12    |  |  |  |
| C  | 8.07 | 9.07 | 10.07 | 11.07 | 12.07 | 13.07 | 14.07 |  |  |  |
| n  | 8    |      |       | 10    |       |       | 12    |  |  |  |
| lb | 2.49 | 2.82 | 3.15  | 3.54  | 3.87  | 4.27  | 4.60  |  |  |  |

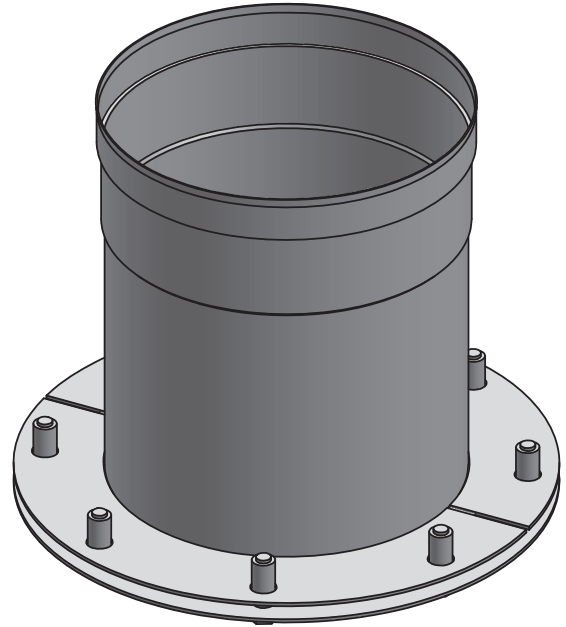


|          |     |       |            |      |      |             |   |  |  |  |
|----------|-----|-------|------------|------|------|-------------|---|--|--|--|
| drawn by | JJR | model | SW-NAKS-CK | code | NWHA | description | SW-NAKS-CKØ-NWHA No-Weld Hood Adapter - Start |  |  |  |
|----------|-----|-------|------------|------|------|-------------|---|--|--|--|

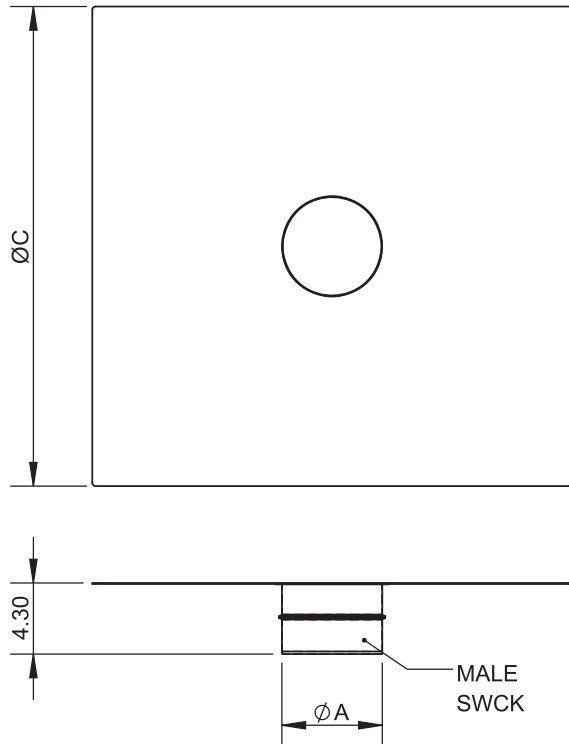

|    |       |       |       |       |       |       |       |       |       |       |
|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Ø  | 6     | 7     | 8     | 9     | 10    | 11    | 12    | 13    | 14    | 16    |
| A  | 6     | 7     | 8     | 9     | 10    | 11    | 12    | 13    | 14    | 16    |
| C  | 29    |       |       |       |       |       |       |       |       |       |
| lb | 15.36 | 15.31 | 15.25 | 15.16 | 15.05 | 14.89 | 14.72 | 14.52 | 14.30 | 13.75 |

|    |       |       |       |       |       |       |       |       |       |       |
|----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Ø  | 18    | 20    | 22    | 24    | 26    | 28    | 30    | 32    | 34    | 36    |
| A  | 18    | 20    | 22    | 24    | 26    | 28    | 30    | 32    | 34    | 36    |
| C  | 36    |       |       | 42    |       |       |       | 48    |       |       |
| lb | 21.16 | 20.39 | 19.51 | 19.51 | 26.77 | 25.65 | 24.42 | 32.63 | 31.17 | 29.59 |

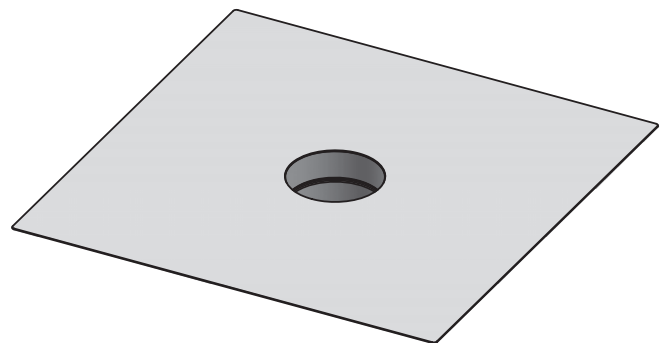

\*INCLUDES 1 LOCKING BAND

|          |     |       |            |      |     |             |   |  |  |  |
|----------|-----|-------|------------|------|-----|-------------|---|--|--|--|
| drawn by | JJR | model | SW-NAKS-CK | code | FPE | description | SW-NAKS-CKØ-FPE Fan Plate Adapter - End |  |  |  |
|----------|-----|-------|------------|------|-----|-------------|---|--|--|--|