
HOODMART
YOUR ONE STOP HOOD SHOP

172 REASER COURT
ELYRIA, OHIO 44035


PHONE: 440-365-1399
FAX: 440-365-2100

TOLL FREE PH: 800-715-1014
TOLL FREE FAX: 800-716-1214


WWW.HOODMART.COM
SALES@HOODMART.COM

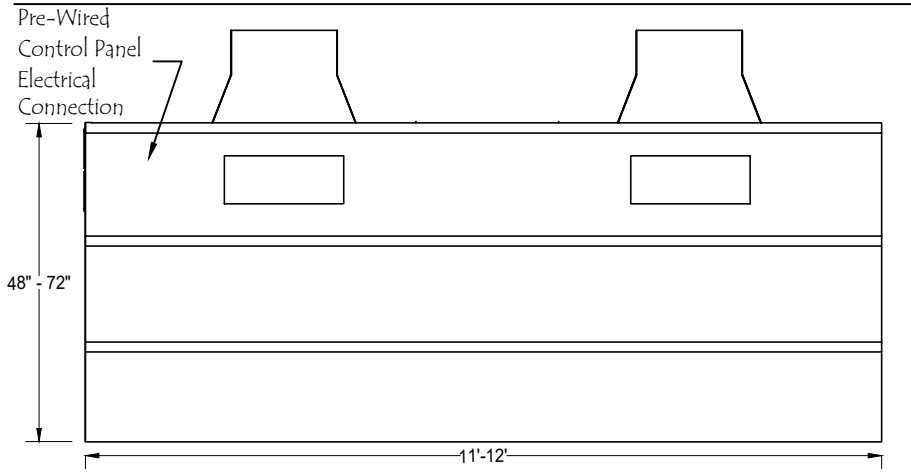

PLAN VIEW
SCALE: NOT TO SCALE

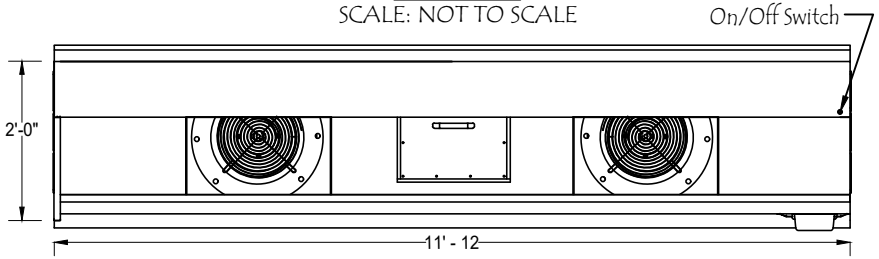

FRONT VIEW
SCALE: NOT TO SCALE

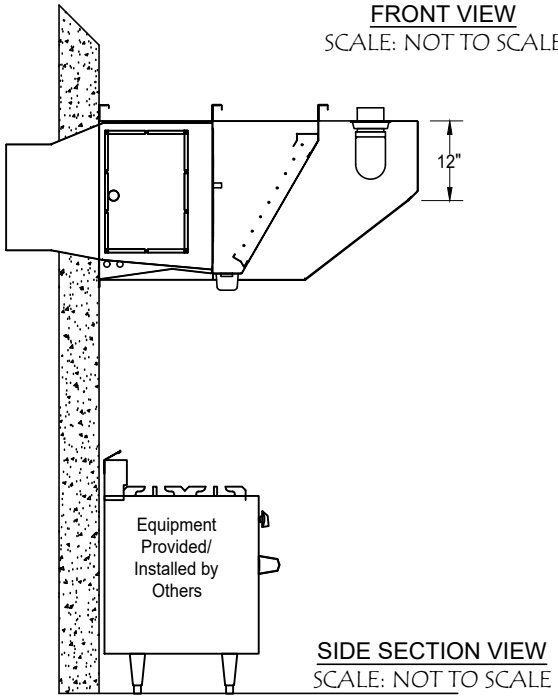

SIDE SECTION VIEW
SCALE: NOT TO SCALE

All-In-One MUA (TYPE I)

Hood General Specifications

- First UL710 listed assembly with integrated fan, tested in accordance with AMCA 210-16 and ASHRAE 51-16
- NFPA96 and IMC approved
- FDNY COA listed
- NSF certified
- **11'-0" - 12'-0"** long with single blower and outlet for exhaust and single blower and inlet for supply
- Hoods are constructed of 18 gauge stainless steel where exposed, 18 gauge aluminized where not exposed
- All joints are welded liquid tight, without seams
- Grease Filters are 20" stainless steel baffle type which carry a UL listing
- Grease trough is made to receive grease extracted by the filter
- Ductwork sloped back to grease trough
- Each Grease trough is equipped with a stainless steel cup
- Pre-wired Integrated Control Panel
- 100W incandescent Lights
- Integrated 2000 CFM Exhaust and 1800 CFM Supply Fans
- 115/1/60, 30 amps total draw
- **PATENT # 12,611,910**

It is the responsibility of the architect/owner to ensure that the hood clearance from limited-combustible and combustible materials is in compliance with local code requirements

NFPA® NSF® CLASSIFIED UL EPH ANSI/NSF2 c UL us LISTED Safety Certified MH62534

11969 10/22