



TOLL FREE PH: 800-715-1014 TOLL FREE FAX: 800-716-1214 WWW.HOODMART.COM

SALES@HOODMART.COM

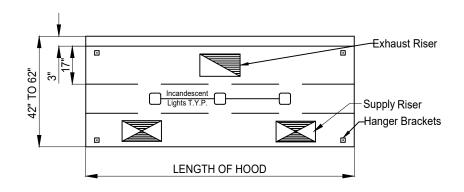

It is the responsibility of the architect/owner to ensure that the hood clearance from limited-combustible and combustible materials is in compliance with local code requirements

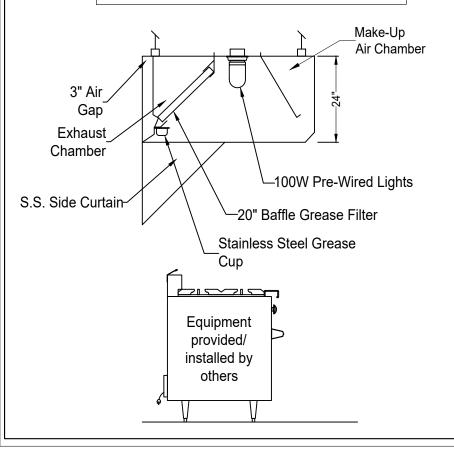

## Island Make-Up Air (TYPE I)

Hood General Specifications

- Hoods are built in accordance with NFPA 96, NSF Specifications and Conforms to UL listed to ANSI / UL and CAN / ULC
- Hoods are constructed of 18 gauge steel
- All joints are welded liquid tight, without seams
- Grease Filters are 20" stainless steel baffle type which carry a UL listing
- Grease trough is made to receive grease extracted by the filter
- Each Grease trough is equipped with a stainless steel cup
- Factory does not cut holes in hood Hoods 10' and larger receive 6 hanger brackets total
- Standard 430 all stainless steel



11028 6/20