

C

12"

D

Α

14"

HOOD

NO.


NO.

MODEL

28D

EF-1

16"



WIDTH LENG.

PLAN VIEW SCALE: 3/8"=1'-0"

TOTAL

EXH. CFM

CFM

2400

TAG

MAX.

COOKING


TEMP.

MODEL


28D

LENGTH

18"



FAN MODEL	А	В	C	D
28D	17½″	171/2"	2″	4"

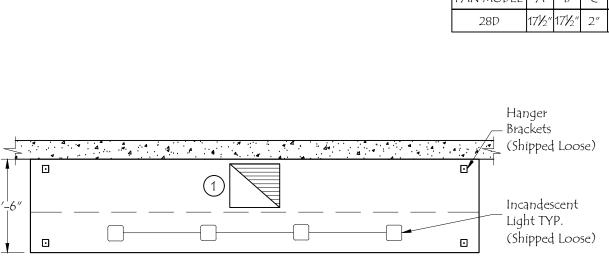

QTY.

(1) EXHAUST PLENUM

WIDTH LENG.

S.P.

.375"

RISER(S)

QTY.

RPM

1625

CFM


H.P.


1/2

S.P.

Ø

VOLT



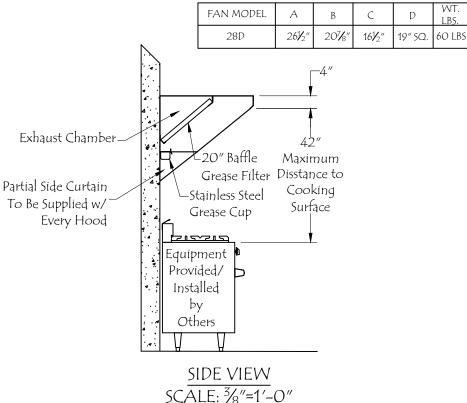

HOOD

CONSTRUCTION

CFM


S.P.

RPM

Ø

VOLT

FLA

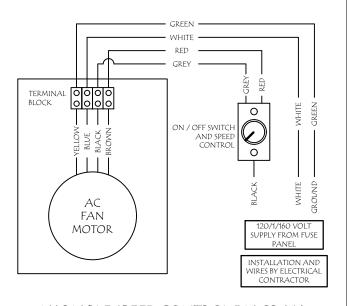

VARIABLE SPEED CONTROL DIAGRAM NOT TO SCALE

\*IT IS THE RESPONSIBLITY OF THE ARCHITECT/OWNER TO ENSURE THAT THE HOOD CLEARANCE FROM LIMITED-COMBUSTIBLE MATERIALS IS IN COMPLIANCE WITH LOCAL CODE REQUIREMENTS

\*ALL EQUIPMENT IS UL LISTED COMPONENTS\*

HOODMART HOODS ARE BUILT IN COMPLIANCE WITH: NFPA #96 & UL710

AND ARE RECOGNIZED BY ONE OR MORE OF THE FOLLOWING: - NSF INTERNATIONAL -UL



REVISIONS





1	EXSSO12C 144"N 12X30 144"C		ЭМ	700	246	14"	16"	1	2400	.375″		1	_		_	_	CTAINUECC CTEEL						
			D	Deg.	240	)0					_						STAINLESS	SIEEL					
FILTER(S)						LIGHT(S)				UTILITY CABINET(S)										EST. HOOD	REV	DATE	
	NO. TYPE		OT LIEU	LUCIOLIT	LEVICELL	77./	חר	OT		WIRE GUARD	FIRE SYSTEM			ELE	ELECTRICAL		SWITCHES		WEIGHT		ĺ		
NO.			QTY.	HEIGHT	LENGTH	IY	PE	QT	Y. Gi		TYPE			SIZE		N	ODEL#	QUAN	YTITY	LOCATION	WLIGITI		1
4	1 S.S. BAFFLE W/ HANDLES	LANDLEC	4	20″	16"	INIC ANIDECC	NDESCENT LIGHT			NO	1								-		250	7 !	
1		TANDLES	4	20″	20"	INCANDESC	ENI LIGH	711 4		110											LBS.		
FAN			exhaust fan									SUPPLY FAN										$\neg \mid$	
LINIT	LUNIT   FAN UNIT MODEL#	DFI #																				<b>一</b> ,	1

FLA

TOTAL SUP. CFM

(2) SUPPLY PLENUM

WIDTH LENG. QTY...

BLOWER

RISER(S)

HOUSING

CFM

S.P.

TAG

HOODMART. **EQUIPMENT SCHEDULE** CONCESSION CANOPY CONTRACT NO. -ITEM NO. ЈОВ: LOC: -CUST: -SHT -DWG#11917