

Models:

IFS-15

IFD-30



Model IFS-15 (shown above)

Standard Features:

- Stainless steel front and sides
- Stainless steel tank, 15Lb (6.8Kg) capacity
- Set of twin fryer baskets.
- Easy to clean design with protected controls
- Power and Heat-On indicator lamps
- 3000 Watts per frypot
- Temperature safety reset switch cut-out
- Robust drain tap
- Stainless steel lid
- Optional: One large fryer basket in lieu of twin set of baskets
- ETL, NSF, FCC listed
- One-Year limited parts & labor warranty

Specifications:


The UL Electric Countertop Induction Fryers are available in two size groups: Single tank model; 11.3" (288mm) wide IFS-15, or twin tank models 22.7" (576mm) wide IFD-30. Both models are 18.8" (478mm) deep x 16.1" (410mm) high, with stainless steel front and sides, and stainless steel tank. Baskets are available in 2 sizes: Small 8.4" D x 4.2" W x 5.7" H & Large 8.4" D x 8.4" W x 5.7" H. Electronic thermostat provides concise accurate control. Robust and easy to use drain tap. Twin tank model has two sets of independent controls. 3000 watts per frypot.




Models	Total kW Load 208V ~/60Hz			Plug	Amp Drawn Per Plug	Watts	Temp. Range
	Tanks	Phase	Amp Draw				
IFS-15	1	1	15	6-20P	15	3000	140°F – 380°F
IFD-30	2	1	30	6-20P	(2) 15	3000+3000	140°F – 380°F

Model	Overall Dimensions			Cu Ft	Shipping Wt. Lb/Kg
	Height	Width	Depth		
IFS-15	16.1" (410mm)	11.3" (288mm)	18.8" (478mm)	3.40	33.0 / 15.0
IFD-30	16.1" (410mm)	22.7" (576mm)	18.8" (478mm)	6.26	58.5 / 26.6

FRONT VIEW

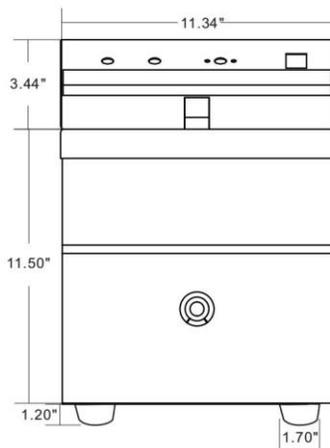

SIDE VIEW

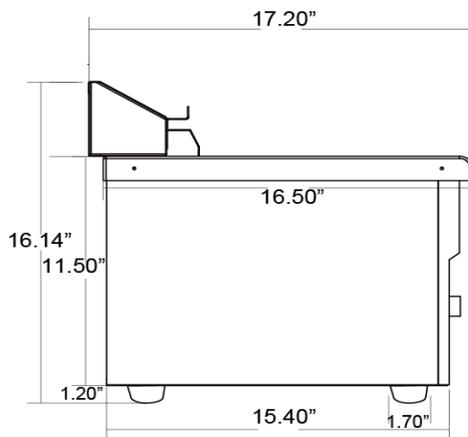


IFS-15 & IFD-30

North American Kitchen Solutions (NAKS) products are not approved or authorized for home or residential use, but are intended for commercial applications only. NAKS will not provide service, warranty, maintenance or support of any kind other than in commercial applications.

MINIMUM CLEARANCE REQUIRED FROM UNIT TO THE NEAREST COMBUSTIBLE OBJECT

Side	Rear
5.0" (127mm)	5.0" (127mm)

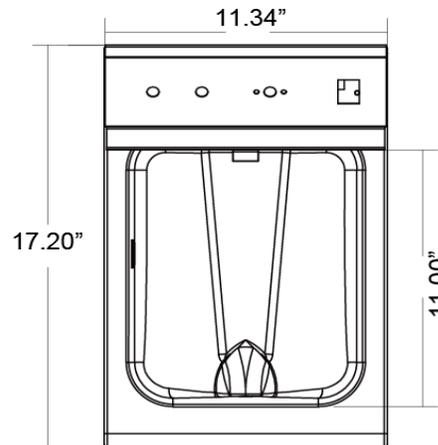

IFS-15

TOP VIEW

Form# IFS-15 & IFD30 (06-2018)