

UTBH SERIES

Horizontal Restaurant Exhausters



INDUSTRIES SERVED

- Restaurant


FEATURES

- UL762 Listed for the removal of cooking vapors
- Meets NFPA-96 Installation guidelines
- Convenient hinged curb mounting
- Clean-out access door
- Fully welded, 16 gauge or heavier blower housing c/w shaft seal to eliminate grease leakage
- 2 inch drain connection
- Pillow block ball bearings
- Upblast discharge directs exhaust away from roof
- Heavy duty, backward inclined non-overloading wheel



DIMENSIONS

MODEL	A	CURB (SQUARE)	AU	D	E	H	L	RO	SHAFT DIAMETER	UNIT WEIGHT (LBS) (without motors & drives)
UTBH13	21 1/2"	20 1/2"	27 7/16"	14 3/4"	10 5/8"	30 15/16"	41 7/8"	17 1/2"	1"	TBA
UTBH16	25 1/2"	24 1/2"	31 1/2"	17 7/8"	13 1/4"	34 1/4"	48 11/16"	21 5/16"	1 3/16"	TBA
UTBH20	29 1/2"	28 1/2"	35 7/8"	21 9/16"	15 5/8"	40 1/16"	56 1/8"	25 1/2"	1 3/16"	TBA
UTBH24	34 1/2"	33 3/8"	40 5/8"	26 5/16"	19 1/2"	43 5/8"	66 7/8"	30 1/8"	1 7/16"	TBA


TOP VIEW

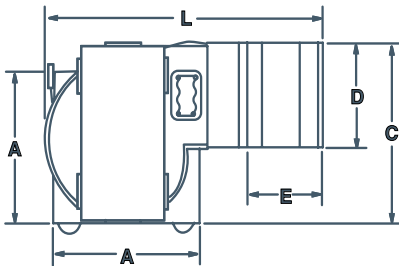

SIDE VIEW

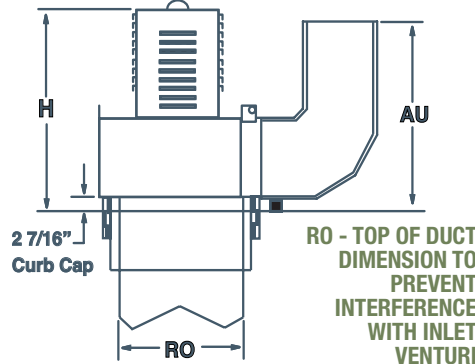

UNIT SHOWN WITH COVER REMOVED

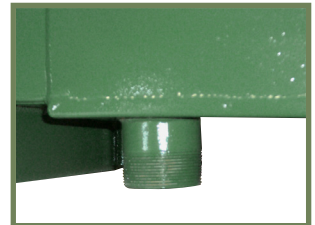

2" DRAIN CONNECTION



CONVENIENT CLEAN OUT ACCESS DOOR

UL762

UL762 LISTED PRODUCTS AND REQUIREMENTS (Kitchen Exhaust)

REQUIREMENT	UTBH	
	STANDARD	ACCESSORY
Designed for removal of smoke and/or grease laden air	●	
Air temperatures up to 300°F	●	
Access for cleanout	●	
Grease drain	●	
Grease collection box		●
Minimum 500 FPM airflow in duct**	●	
Vented roof curb extending discharge minimum 40" above roofline		●
Curb hinge		●

Units must be mounted to extend outlet minimum 40" above roofline
** based on standard NAKS configurations with Motors and Drives

OPTIONAL ACCESSORIES

- Vented roof curbs comes with hinge
- Discharge "V" cap (rain cap)