

Mobile Ventless Exhaust Hood System

State-of-the-Art Ventless Exhaust Hood System Duct-Free with No Installation Required!

NAKS now offers a completely portable ventless exhaust hood system. Complete with an integrated Ansul R-102 wet chemical fire suppression system, this self-contained unit and compact portable design of the ventless hood provides the perfect alternative when venting through a roof or wall is not feasible.

NAKS offers a -NF (No Fire Suppression) version of the commercial ventless hoods. The hood is fire suppression ready for field installation of the Ansul R-102 wet chemical fire suppression system. *Field installations will need to be performed by an authorized Ansul distributor. The ventless exhaust hood system from NAKS requires no roof fans, no duct work, and no hood to hang. Simply put, No Installation Required!

Innovative triple-filter system with updraft technology provides vapor removal requirements for a variety of food service applications and is designed to trap grease particles while removing smoke and reducing cooking odors.

Approved for electric equipment and fryers with oil capacities of up to 85 pounds, this ventless exhaust hood system offers plenty of space and capacity for portable and duct-free cooking.

Ventless Exhaust Hood System Features:

- ✔ Available in 3 sizes to accommodate for 24", 36" and 48" of equipment.
- ✔ Durable and polished 18 gauge Stainless Steel construction.
- ✔ Base unit includes removable sides for ease of cleaning.
- ✔ Triple-filter system designed to trap grease particles while removing smoke and reducing cooking odors.
- ✔ Fully integrated Ansul-R 102 wet chemical fire suppression system.
- ✔ Color-coded, lighted alert system included to ensure system is running safely and efficiently.
- ✔ Interlocking start is a standard feature and does not allow the fryer or hood to operate separately.
- ✔ Casters incorporate swivel and locking front and non-swivel back for portability.
- ✔ Hood system offers -NF (No Fire Suppression) version and is fire suppression ready for field installation of Ansul R-102 wet chemical system
- ✔ Two year limited warranty, one year labor.




3' EXHAUST SYSTEM



4' EXHAUST SYSTEM



Mobile Ventless Exhaust Hood System

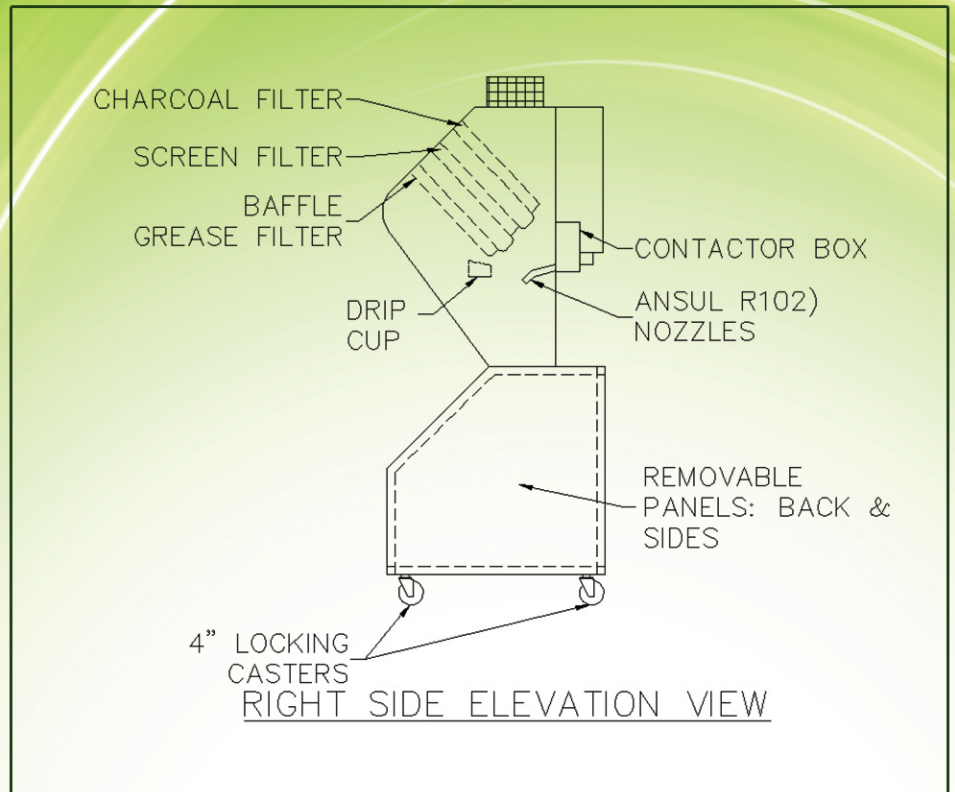

The Ventless Exhaust Hood System is approved for electric equipment and fryers with oil capacities of up to 85 pounds; not to exceed 470 square inches of cooking area.

DIMENSIONS	2'	3'	4'
Height (Overall)	87"	87"	87"
Depth (Overall)	36"	34 ^{1/2} "	34 ^{1/2} "
Width (Overall)	26 ^{1/2} "	39 ^{1/2} "	51 ^{1/2} "
CONSTRUCTION			
Material	18 ga. Stainless Steel		
ELECTRICAL SPECS			
Voltage	208 / 240 V. AC (single or 3 phase)		
Exhaust (CFMs)	750	1125	1500



172 Reaser Ct.
Elyria, Ohio 44035
Telephone: 1.440.365.4567
Email: sales@naksinc.com