
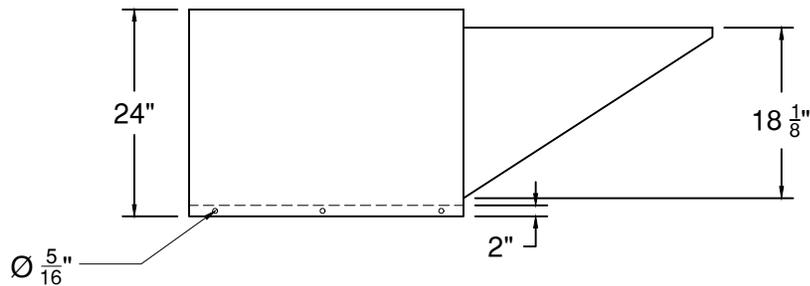



**MODEL # SF7-ECM**

**UL705 FRESH AIR SUPPLY FAN**

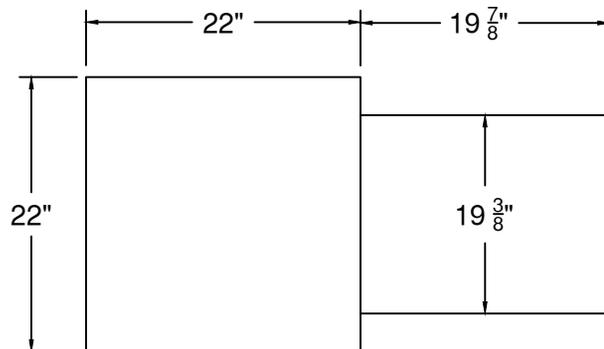

**DIMENSIONAL DATA**  
**21 1/2" SQ. CURB**

**PERFORMANCE DATA**

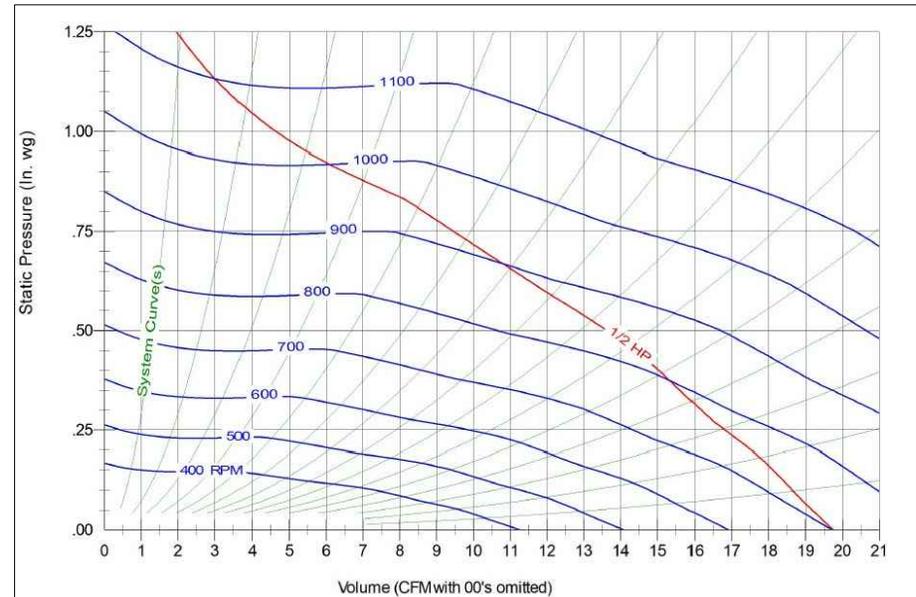

<b>PHASE</b>	1	<b>VOLTS</b>	115
<b>AMPS</b>	9.8	<b>HP</b>	1/2

<b>RPM</b>	.000" S.P.	.250" S.P.	.50" S.P.	.75" S.P.	1.00" S.P.
	CFM	CFM	CFM	CFM	CFM
1100	1975	1649	1312	979	664

**STANDARD FEATURES**

- EFFICIENT EC MOTOR TO ALLOW OPERATION DOWN TO 10% OF SPEED
- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- 2 YEAR LIMITED WARRANTY ON ALL ELECTRIC MOTORS
- GALVANIZED STEEL HOUSING
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- AVERAGE UNIT WEIGHT: 112 LBS
- AVERAGE SHIPPING WEIGHT: 125 LBS

