
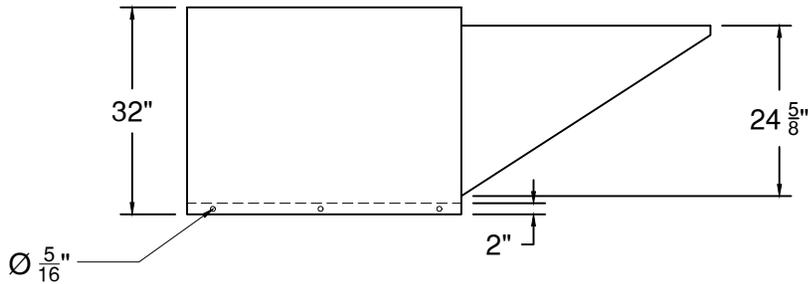



MODEL # SF8-ECM

UL705 FRESH AIR SUPPLY FAN

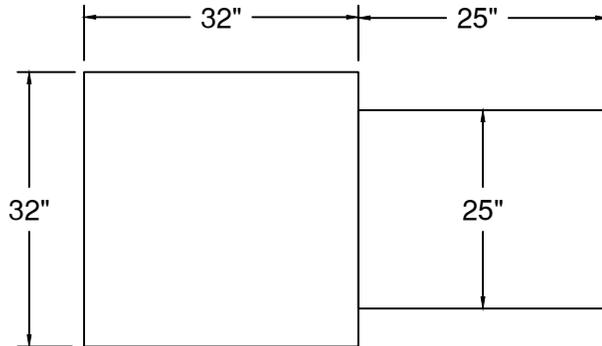

DIMENSIONAL DATA
31 1/2" SQ. CURB

PERFORMANCE DATA

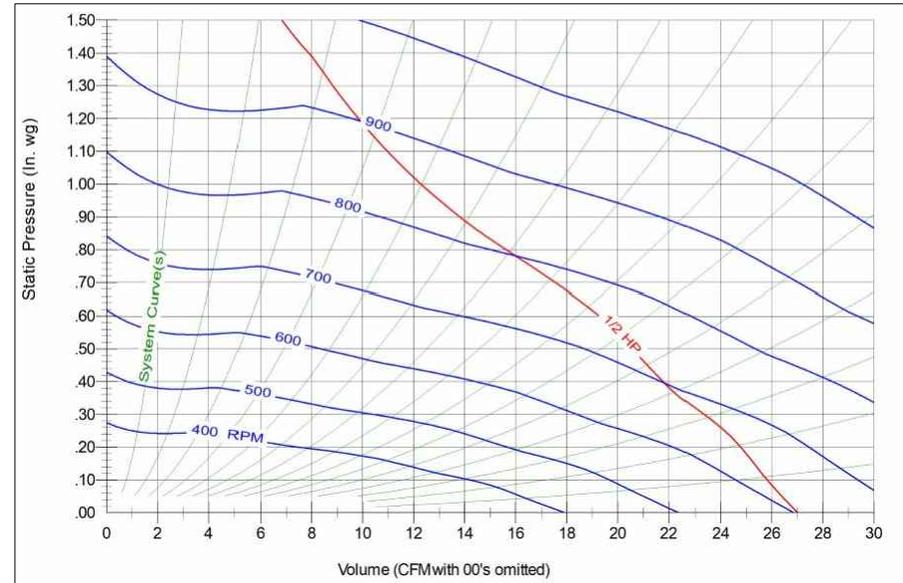

PHASE	1	VOLTS	115
AMPS	9.8	HP	1/2

RPM	.000" S.P.	.250" S.P.	.50" S.P.	.75" S.P.	1.00" S.P.	1.25" S.P.
	CFM	CFM	CFM	CFM	CFM	CFM
1000	2701	2461	1984	1448	1226	845

STANDARD FEATURES

- EFFICIENT EC MOTOR TO ALLOW OPERATION DOWN TO 10% OF SPEED
- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- 2 YEAR LIMITED WARRANTY ON ALL ELECTRIC MOTORS
- GALVANIZED STEEL HOUSING
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- AVERAGE UNIT WEIGHT: 150 LBS
- AVERAGE SHIPPING WEIGHT: 175 LBS

