
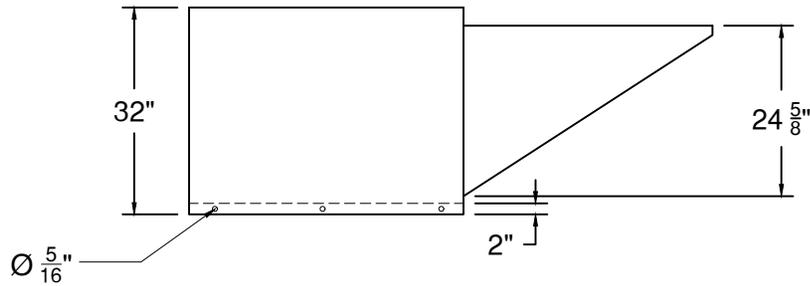



PERFORMANCE DATA

MODEL # SF9-ECM

UL705 FRESH AIR SUPPLY FAN

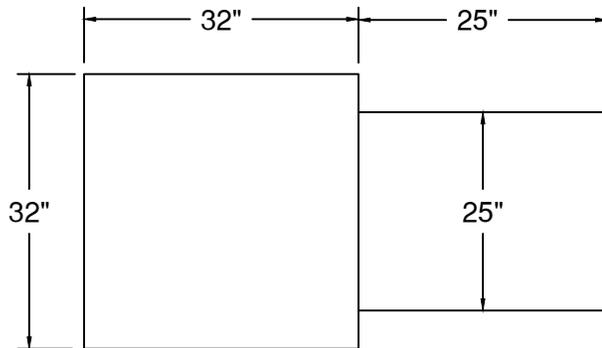

DIMENSIONAL DATA
31 1/2" SQ. CURB

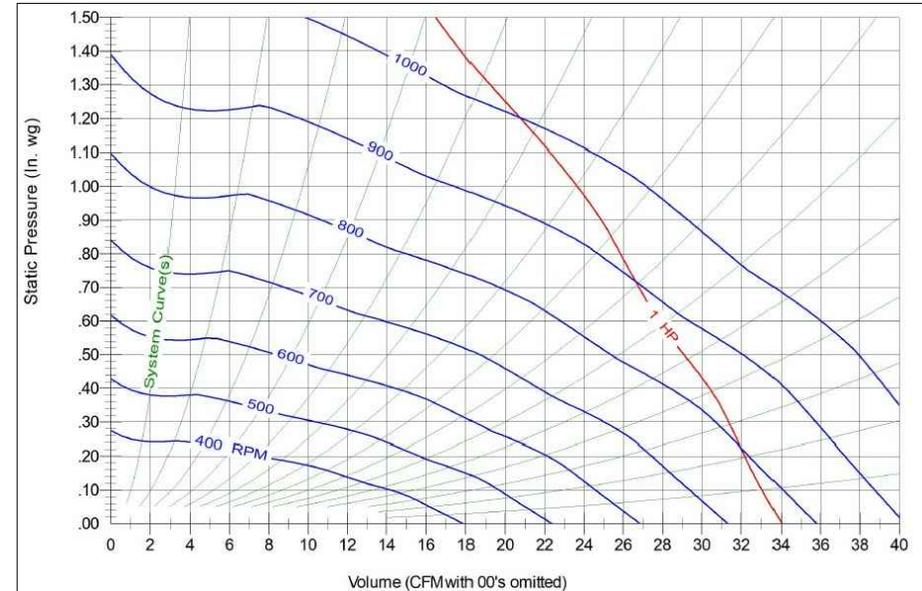

PHASE	1	VOLTS	115
AMPS	9.8	HP	1

RPM	.000" S.P.	.250" S.P.	.50" S.P.	.75" S.P.	1.00" S.P.	1.25" S.P.	1.50" S.P.
	CFM	CFM	CFM	CFM	CFM	CFM	CFM
1000	3404	3253	2807	2500	2244	1855	962

STANDARD FEATURES

- EFFICIENT EC MOTOR TO ALLOW OPERATION DOWN TO 10% OF SPEED
- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- 2 YEAR LIMITED WARRANTY ON ALL ELECTRIC MOTORS
- GALVANIZED STEEL HOUSING
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- AVERAGE UNIT WEIGHT: 150 LBS
- AVERAGE SHIPPING WEIGHT: 179 LBS

