



MODEL # 36B-DB

**UL705 DOWNBLAST EXHAUST FAN
BELT DRIVE**

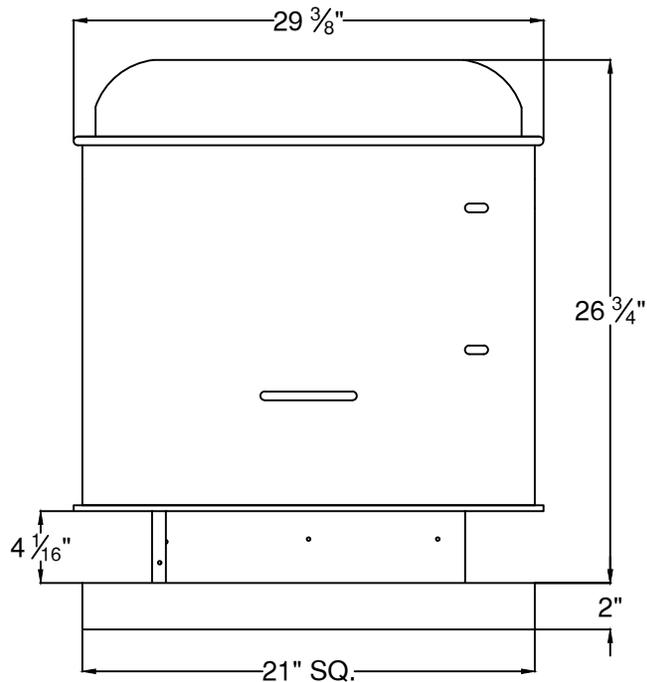

DIMENSIONAL DATA
19 1/2" SQ. CURB

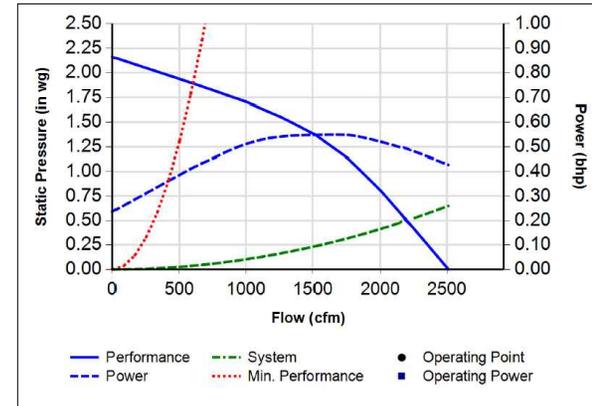

**PERFORMANCE
DATA**

PHASE	1	VOLTS	115
AMPS	6	HP	1/2

RPM	.000" S.P.		.125" S.P.		.250" S.P.		.375" S.P.		.50" S.P.		.625" S.P.		.750" S.P.		.875" S.P.		1.000" S.P.	
	CFM	Sone	CFM	Sone	CFM	Sone	CFM	Sone	CFM	Sone	CFM	Sone	CFM	Sone	CFM	Sone	CFM	Sone
1875	2528	18.6	2451	18.6	2025	14.0	1935	13.5	1844	13.5	1752	12.8	1372	10.5	1212	10.2	564	8.6

STANDARD FEATURES

- LIFTING POINTS LOCATED ON MOTOR BASE FRAME
- VIBRATION ISOLATION
- ALUMINUM BIRD SCREEN
- CONDUIT POST THROUGH BASES CURB CAP
- BACKWARD INCLINED NON-OVERLOADING ALUMINUM WHEEL
- 5 YEAR WARRANTY-MAINTENANCE FREE BEARINGS-PATENTED STEEL
- SHAFT-RATED AT L-50 LIFE OF 200000 HOURS
- VARIABLE PITCH DRIVES DESIGNED FOR 1.5 SERVICE FACTOR
- NEMA 1 DISCONNECTED SWITCH MOUNTED & WIRED
- MOTOR BEARINGS ARE PERMANENTLY LUBRICATED
- 2 YEAR FAN/MOTOR WARRANTY
- AVERAGE UNIT WEIGHT: 83 LBS
- AVERAGE SHIPPING WEIGHT: 97 LBS



LISTED

FANS

UL 705

14036 2/20