
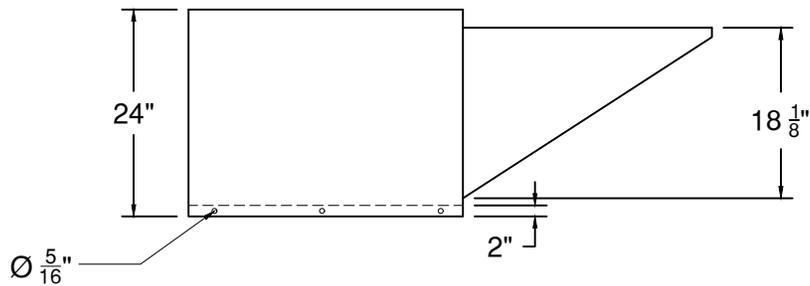


PERFORMANCE DATA


MODEL # SF5-3PH

UL705 FRESH AIR SUPPLY FAN BELT

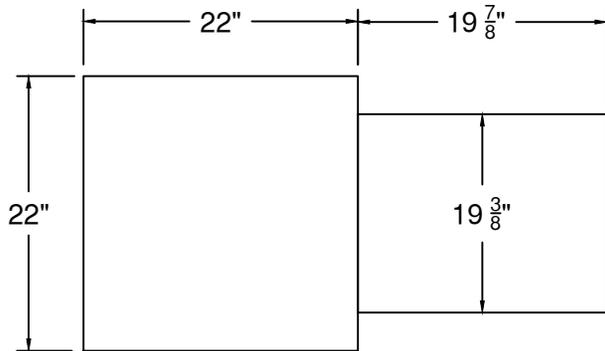

DIMENSIONAL DATA

21 1/2" SQ. CURB

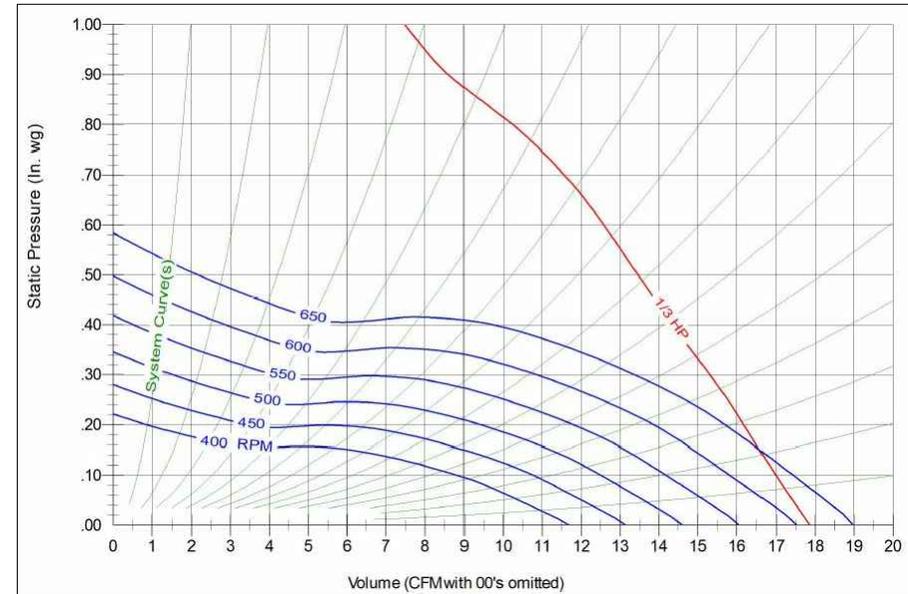

PHASE	3	VOLTS	230/460
AMPS	115/230	HP	1/3

RPM	0"		.125"		.250"		.375"		.5"		.750"		1"	
	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE
440	1289	6.8	955	5.4										
490	1430	8	1158	6.7										
540	1585	9.5	1330	8.1	930	7.2								
585	1727	11	1500	9.6	1212	8.7								

STANDARD FEATURES

- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- GALVANIZED STEEL HOUSING
- HEAVY DUTY BALL BEARINGS SUITABLE FOR -65° TO +250° F
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT
- EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- AVERAGE UNIT WEIGHT: 122 LBS
- AVERAGE SHIPPING WEIGHT: 133 LBS

