

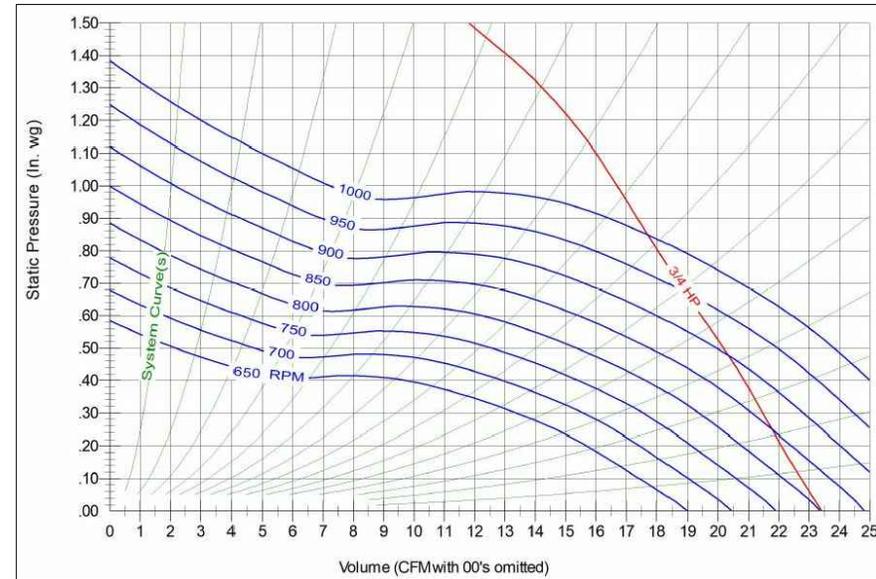


## PERFORMANCE DATA

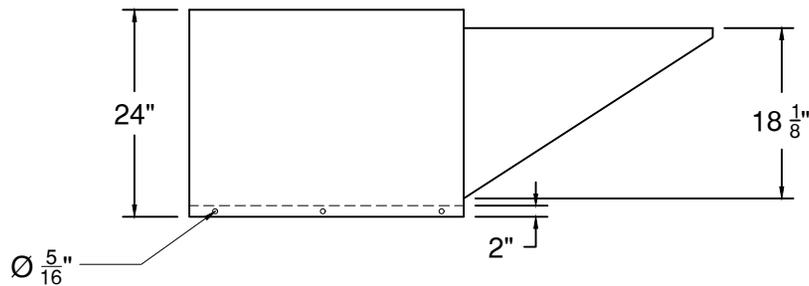

### MODEL # SF7-3PH

## UL705 FRESH AIR SUPPLY FAN BELT

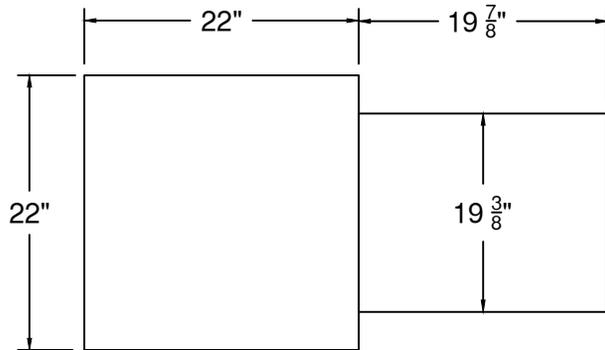

**DIMENSIONAL DATA**  
**21 1/2" SQ. CURB**

<b>PHASE</b>	3	<b>VOLTS</b>	230/460
<b>AMPS</b>	3.2/1.6	<b>HP</b>	3/4

RPM	0"		.125"		.250"		.375"		.5"		.750"		1"	
	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE
690	2012	14.3	1830	13.2	1629	12.3	1329	11.5						
727	2133	16	1962	14.9	1767	14.1	1539	13.3	1130	12.4				
764	2238	17.5	2078	16.5	1899	15.8	1679	15	1343	14.1				
801	2331	18.8	2185	17.9	2010	17.2	1816	16.5	1530	15.7				

### STANDARD FEATURES

- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- GALVANIZED STEEL HOUSING
- HEAVY DUTY BALL BEARINGS SUITABLE FOR -65° TO +250° F
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- AVERAGE UNIT WEIGHT: 122 LBS
- AVERAGE SHIPPING WEIGHT: 145 LBS

