


## PERFORMANCE DATA

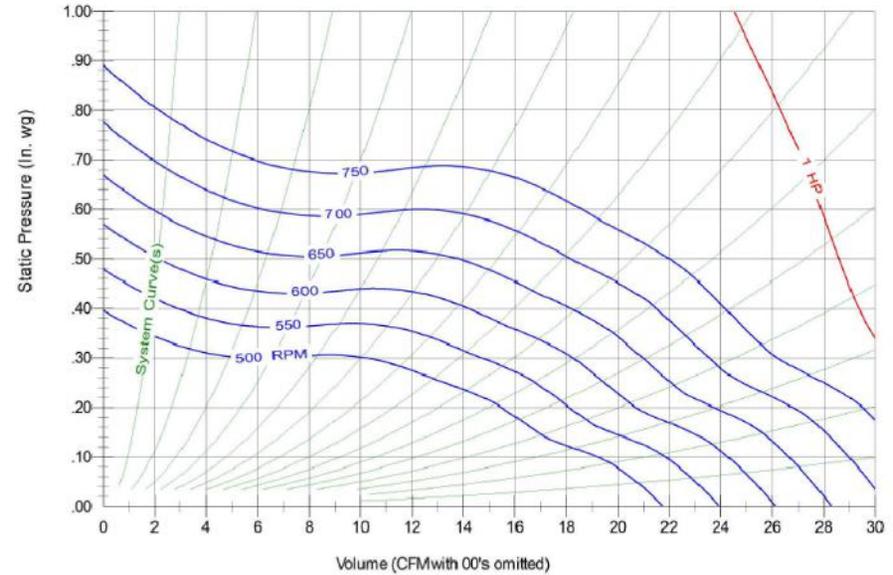

<b>PHASE</b>	3	<b>VOLTS</b>	230/460
<b>AMPS</b>	4.2/2.1	<b>HP</b>	1

RPM	0"		.125"		.250"		.375"		.5"		.750"		1"	
	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE
550	2392	9.9	2106	8.6	1683	8	1080	7.9						
668	2913	13.8	2700	12.6	2330	11.7	2025	11	1550	10.7				
689	2990	14.4	2800	13.4	2404	12.2	2153	11.7	1735	11.3				



### STANDARD FEATURES

- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- GALVANIZED STEEL HOUSING
- HEAVY DUTY BALL BEARINGS SUITABLE FOR -65° TO +250° F
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT
- EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- AVERAGE UNIT WEIGHT: 161 LBS
- AVERAGE SHIPPING WEIGHT: 205 LBS



**MODEL # SF8-3PH**

## UL705 FRESH AIR SUPPLY FAN BELT

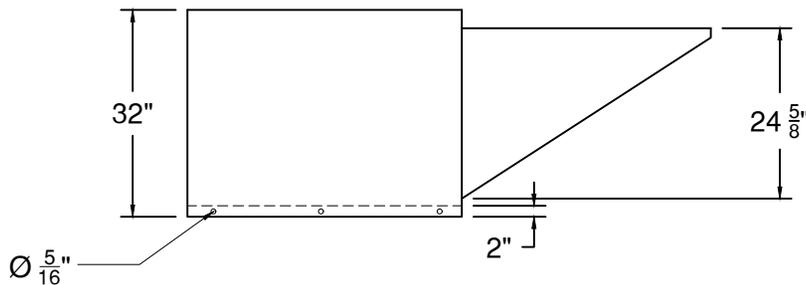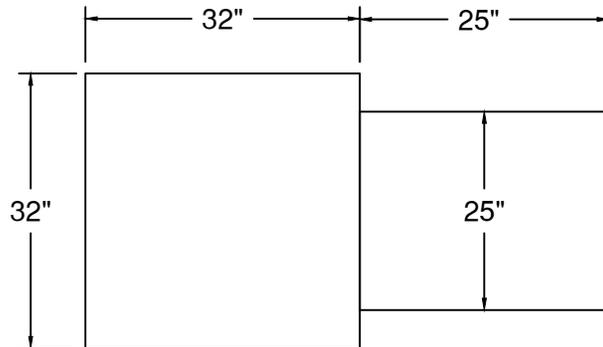

**DIMENSIONAL DATA**  
**31 1/2" SQ. CURB**