
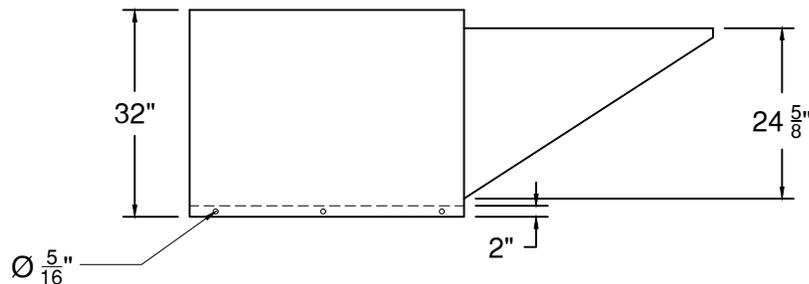



## PERFORMANCE DATA

### MODEL # SF9-3PH

## UL705 FRESH AIR SUPPLY FAN BELT

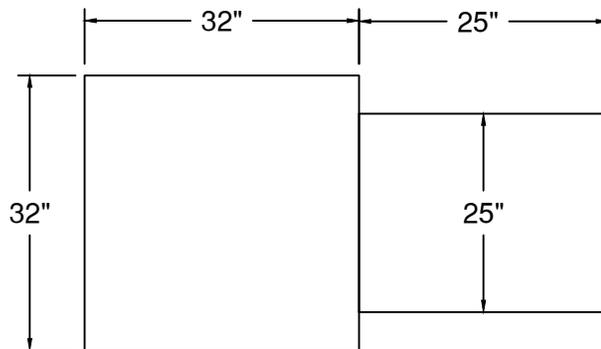

**DIMENSIONAL DATA**  
31 1/2" SQ. CURB

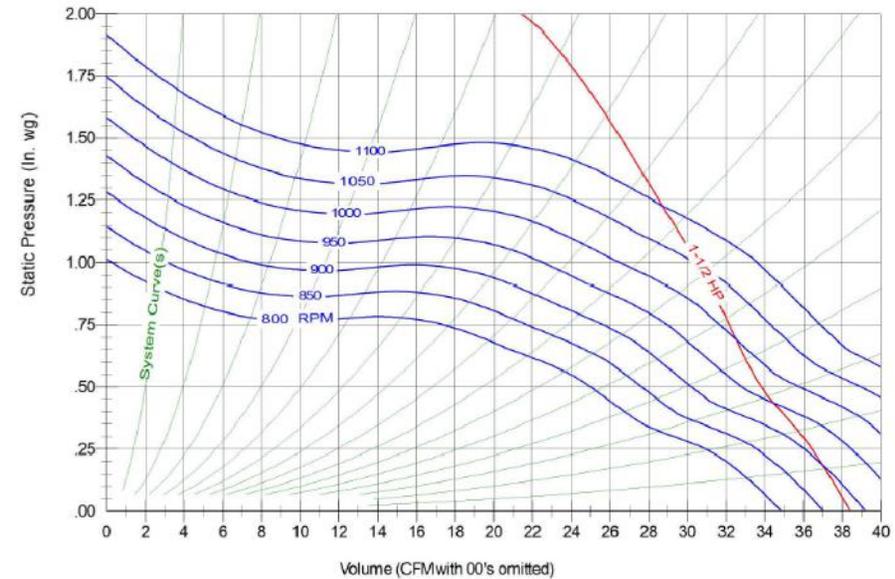

<b>PHASE</b>	3	<b>VOLTS</b>	230/460
<b>AMPS</b>	6/3	<b>HP</b>	1 1/2

RPM	0"		.125"		.250"		.375"		.5"		.750"		1"	
	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE
798	3451	18.5	3300	17.6	3057	16	2719	15.4	2473	14.9	1695	14.2		
830	3608	19.7	3463	18.9	3273	17.5	2922	16.7	2660	16	2024	15.2		
860	3740	21	3595	19.9	3402	18.5	3079	17.6	2811	17	2254	16.1		

### STANDARD FEATURES

- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- GALVANIZED STEEL HOUSING
- HEAVY DUTY BALL BEARINGS SUITABLE FOR -65° TO +250° F
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- AVERAGE UNIT WEIGHT: 161 LBS
- AVERAGE SHIPPING WEIGHT: 215 LBS

