


## PERFORMANCE DATA

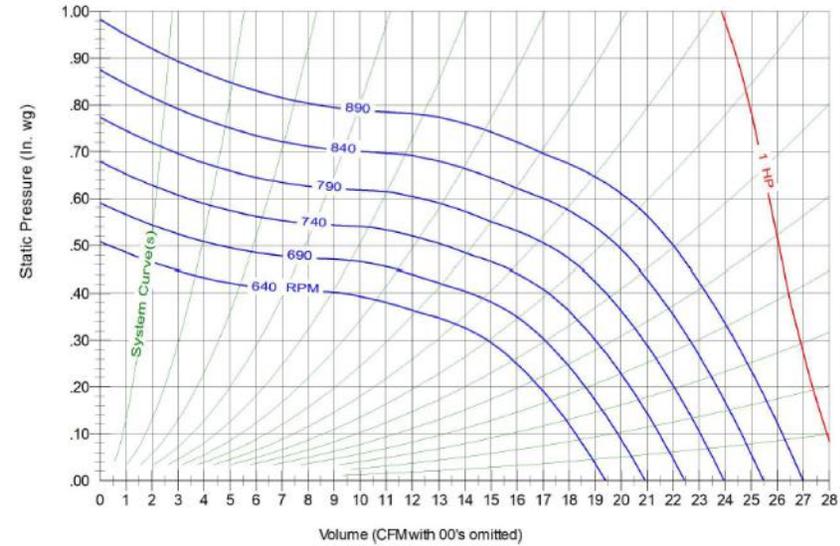

<b>PHASE</b>	1	<b>VOLTS</b>	115/230
<b>AMPS</b>		<b>HP</b>	1

RPM	0"		.125"		.250"		.375"		.5"		.750"		1"	
	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE
639	1938	8.2	1790	7.6	1590	6.5	1180	5						
721	2180	10.5	2060	9.9	1900	9.2	1690	7.8	1130	6.2				
822	2490	13.9	2380	13.3	2250	12.6	2100	11.7	1890	10.3				
887	2690	16	2590	15.5	2475	14.9	2350	14.4	2190	13	1430	10		

### STANDARD FEATURES

- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- GALVANIZED STEEL HOUSING
- HEAVY DUTY BALL BEARINGS SUITABLE FOR -65° TO +250° F
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- AVERAGE UNIT WEIGHT: 106 LBS
- AVERAGE SHIPPING WEIGHT: 180 LBS



**MODEL # SF17**

## UL705 FRESH AIR SUPPLY FAN INLINE BELT

