

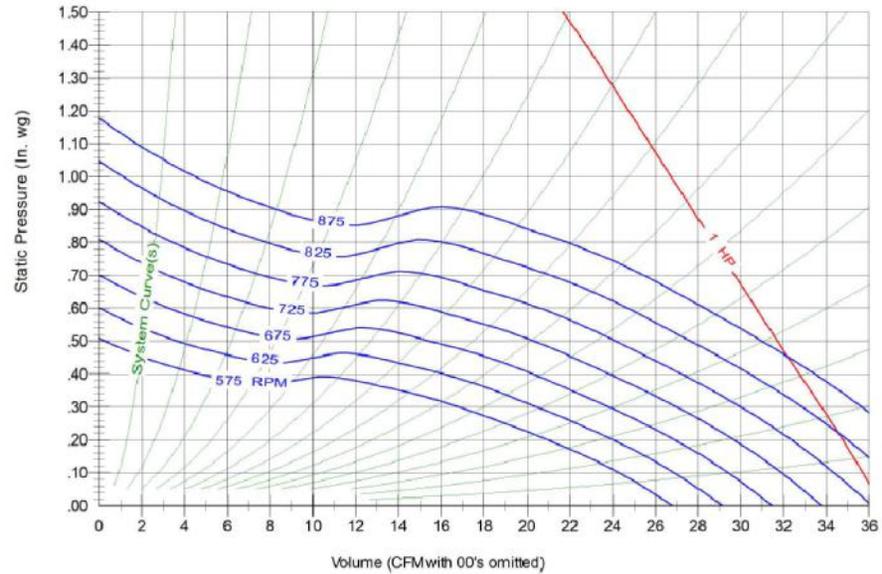


PERFORMANCE DATA

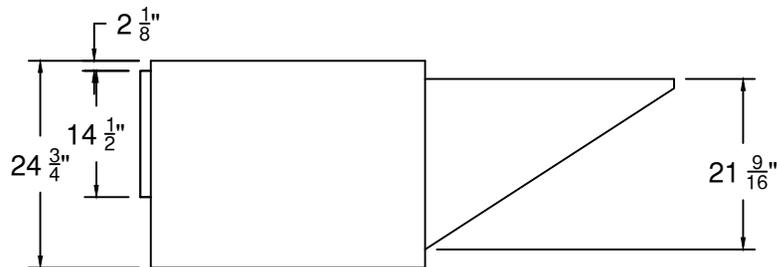

MODEL # SFI8 UL705 FRESH AIR SUPPLY FAN INLINE BELT

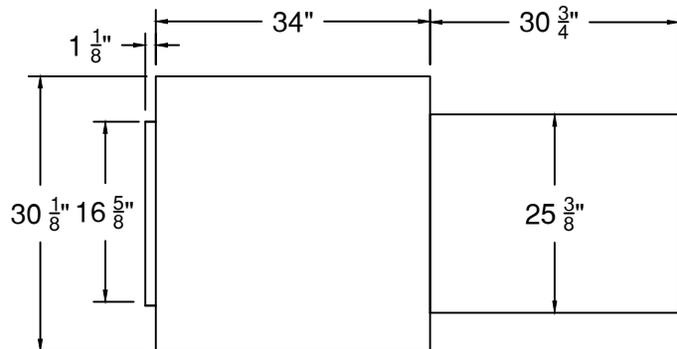

PHASE	1	VOLTS	115/230
AMPS		HP	1

RPM	0"		.125"		.250"		.375"		.5"		.750"		1"	
	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE
574	2660	7.6	2350	7	1885	6.1	1230	5.1						
626	2910	9	2630	8.4	2245	7.7	1780	6.6						
720	3350	11.9	3115	11.4	2810	10.9	2430	9.9	2005	8.8				
773	3590	13.5	3380	13.1	3115	12.7	2810	12.1	2385	10.8				

STANDARD FEATURES

- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- GALVANIZED STEEL HOUSING
- HEAVY DUTY BALL BEARINGS SUITABLE FOR -65° TO +250° F
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT
- EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- AVERAGE UNIT WEIGHT: 200 LBS
- AVERAGE SHIPPING WEIGHT: 300 LBS

