



MODEL # SF19

**UL705 FRESH AIR SUPPLY FAN
INLINE BELT**

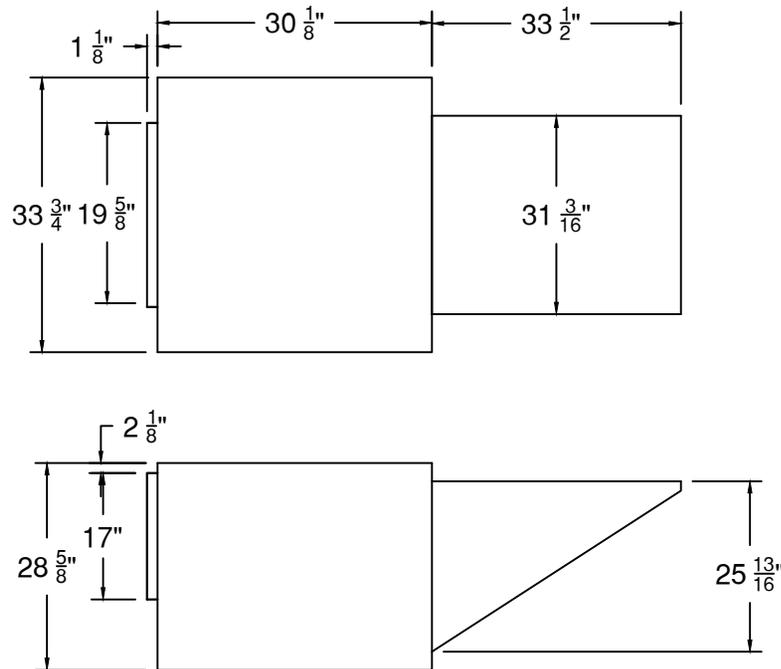

PERFORMANCE DATA

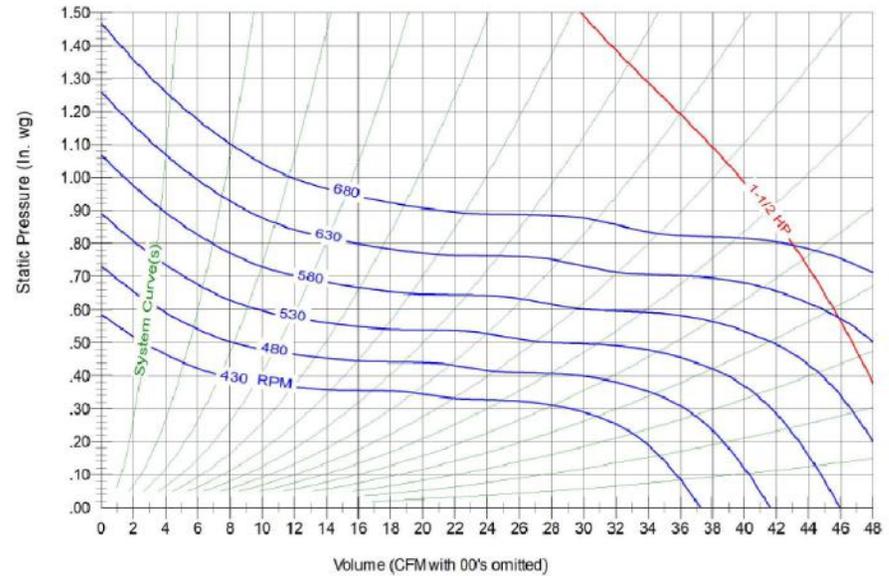

PHASE	1	VOLTS	115/230
AMPS		HP	1 1/2

RPM	0"		.125"		.250"		.375"		.5"		.750"		1"	
	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE	CFM	SONE
430														
488	4355	10.2	3910	8.5	3322	7.1	2490	6						
533	4750	12.1	4355	10.5	3880	9.1	3270	7.9	2025	6.4				
581	5180	14.5	4825	12.9	4390	11.3	3890	10	3210	8.8				

STANDARD FEATURES

- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- GALVANIZED STEEL HOUSING
- HEAVY DUTY BALL BEARINGS SUITABLE FOR -65° TO +250° F
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT
- EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- AVERAGE UNIT WEIGHT: 245 LBS
- AVERAGE SHIPPING WEIGHT: 333 LBS

