
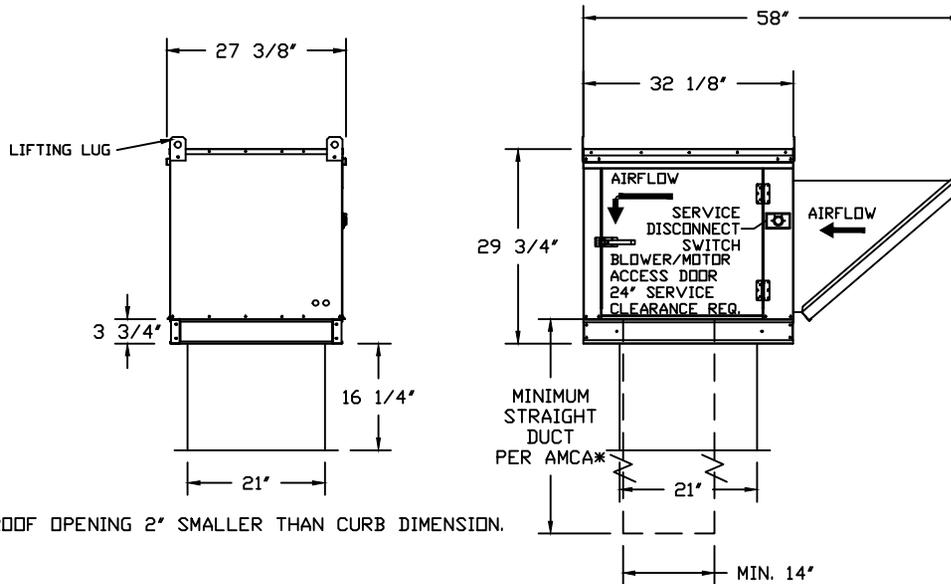


**MODEL #
SF5PH3H**


**UL705 FRESH AIR
SUPPLY FAN BELT**

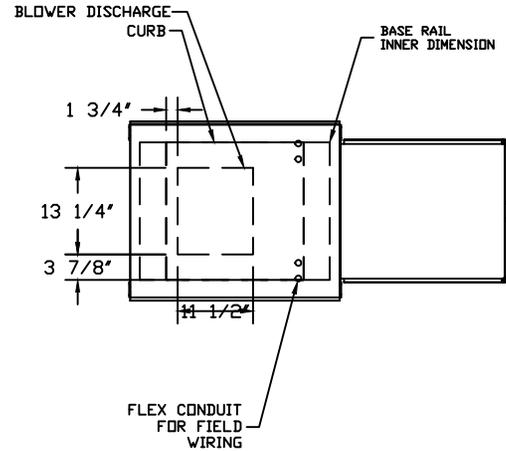

ROOF OPENING 2" SMALLER THAN CURB DIMENSION.

**DIMENSIONAL DATA
21" SQ. CURB**

PERFORMANCE DATA

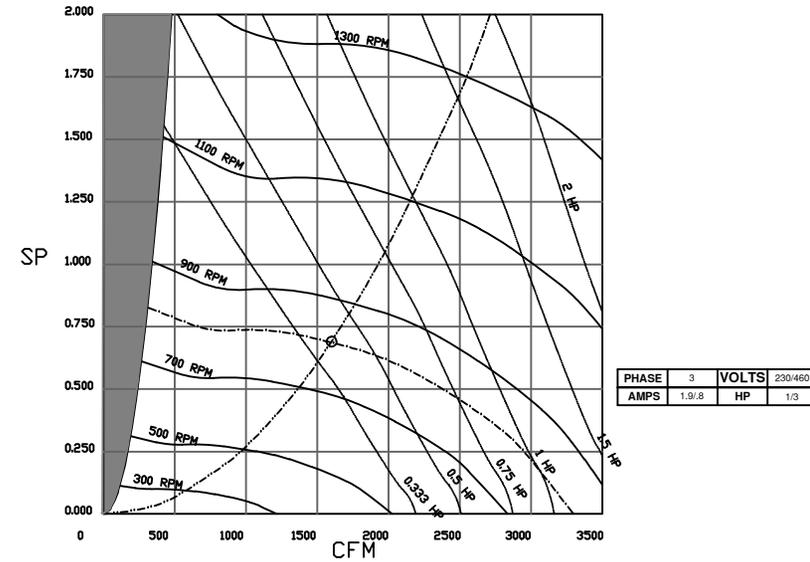

CFM	Static Pressure in Inches W.G.					
	0	0.25	0.5	0.75	1	1.25
500	RPM/BHP	472 / 0.04	660 / 0.09	800 / 0.14	916 / 0.20	1018 / 0.27
1000		492 / 0.09	674 / 0.16	820 / 0.24	944 / 0.32	
1500		371 / 0.11	548 / 0.19	703 / 0.29		

STANDARD FEATURES

- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- GALVANIZED STEEL HOUSING
- HEAVY DUTY BALL BEARINGS SUITABLE FOR -65° TO +250° F
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- MIAMI DADE IMPACT AND WIND CERTIFICATION +30/-130 PSF - MIAMI DADE COUNTY PRODUCT CONTROL APPROVED, FLORIDA BUILDING CODE APPROVAL
- AVERAGE UNIT WEIGHT: 208 LBS
- AVERAGE SHIPPING WEIGHT: 240 LBS
- HURRICANE RATED

