
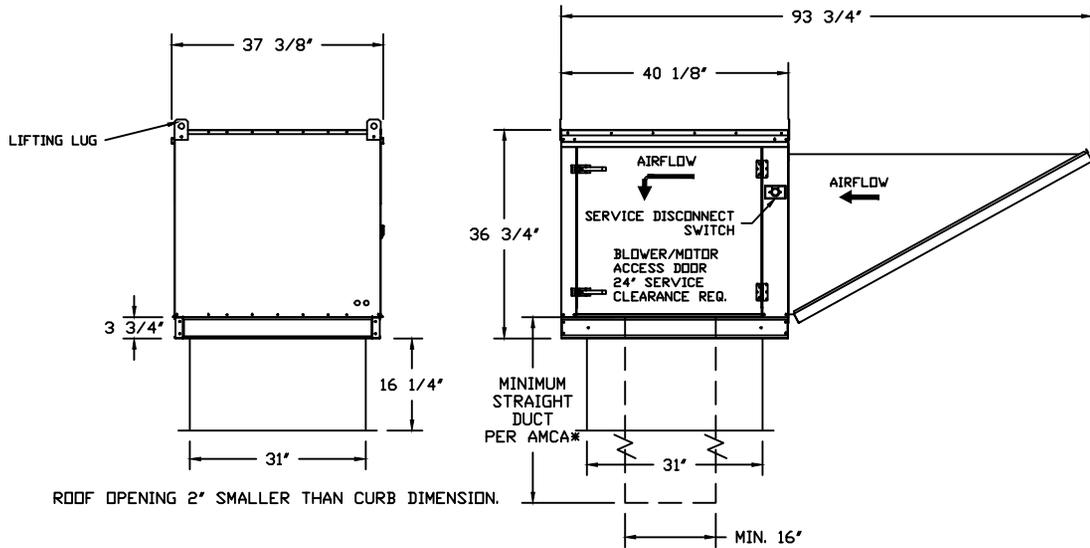


**MODEL #
SF9PH3H**


**UL705 FRESH AIR
SUPPLY FAN BELT**

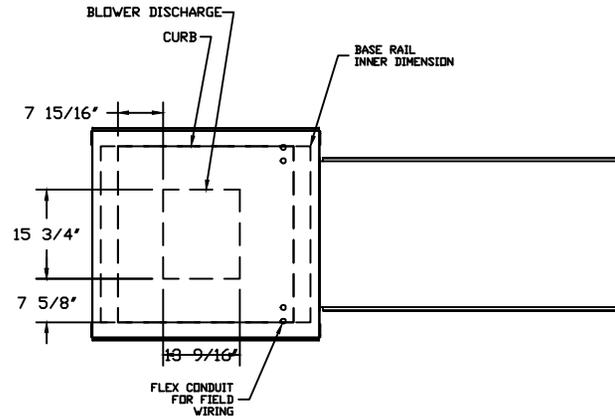

ROOF OPENING 2" SMALLER THAN CURB DIMENSION.

DIMENSIONAL DATA
31" SQ. CURB

PERFORMANCE DATA

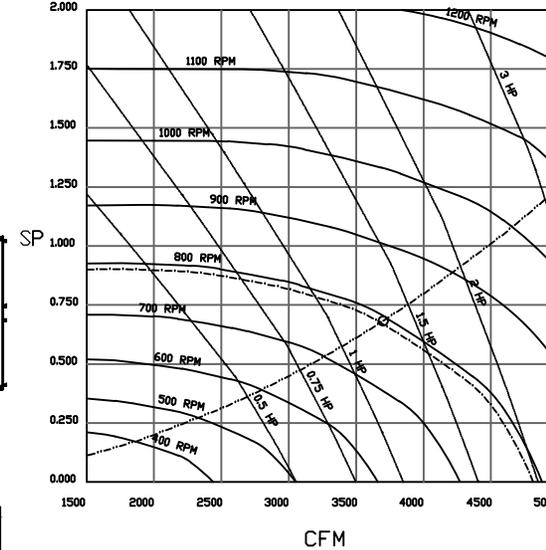

PHASE	3	VOLTS	230/460
AMPS	5.2/2.6	HP	1 1/2

CFM	Static Pressure in Inches W.G.								
	0	0.25	0.5	0.75	1	1.25	1.5	1.75	2
1500		429 / 0.13	588 / 0.21	718 / 0.31	830 / 0.41	929 / 0.51	1019 / 0.62	1101 / 0.73	1178 / 0.85
2000		328 / 0.14	458 / 0.22	601 / 0.32	723 / 0.44	830 / 0.56	927 / 0.69	1015 / 0.82	1092 / 0.94
2500		410 / 0.27	503 / 0.37	626 / 0.49	739 / 0.62	839 / 0.76	931 / 0.91	1017 / 1.06	1097 / 1.22
3000		492 / 0.47	563 / 0.59	661 / 0.72	763 / 0.86	858 / 1.02	945 / 1.18	1026 / 1.35	
3500		574 / 0.75	631 / 0.88	708 / 1.03	796 / 1.18	883 / 1.35			
4000		656 / 1.12	704 / 1.27	765 / 1.43					

STANDARD FEATURES

- FLEXIBLE FORWARD CURVED BELT DRIVE BLOWERS
- OPERATE AT LOW SPEED AND LOW NOISE LEVELS
- GALVANIZED STEEL HOUSING
- HEAVY DUTY BALL BEARINGS SUITABLE FOR -65° TO +250° F
- WEATHER PROOF CABINET DESIGNED FOR OUTDOOR ROOF MOUNTING
- FILTERS DESIGNED WITH LARGE SURFACE AREA FOR EFFICIENT FILTRATION
- WASHABLE ALUMINUM MESH FILTER ARE LOCATED IN THE INTAKE HOOD AND ARE ACCESSIBLE THROUGH THE HOOD END CAP FOR EASE OF SERVICE
- EASY ON-SITE ADDITION OF CUSTOMER SUPPLIED AIR SUPPLY DUCT
- EXTENSION BETWEEN THE INTAKE HOOD AND UNIT PROVIDES ADDITIONAL SEPARATION WHERE NECESSARY
- MIAMI DADE IMPACT AND WIND CERTIFICATION +30/-130 PSF -
- MIAMI DADE COUNTY PRODUCT CONTROL APPROVED,
- FLORIDA BUILDING CODE APPROVAL
- AVERAGE UNIT WEIGHT: 208 LBS
- AVERAGE SHIPPING WEIGHT: 240 LBS
- HURRICANE RATED

