

## Grease Duct Spec

**Model:**

**DW-NAKS-CK-RC-KIT04**

**Double Wall 12" Vertical**



- 2x J-600 Sealant
- 1x DW-NAKS-CK12-LSB-RC Light Support Band
- 1x DW-NAKS-CK12-APS-RC Anchor Plate Support
- 1x DW-NAKS-CK12-24L-RC 24" Fixed Length
- 1x DW-NAKS-CK12-24CL-RC 24" Cut Length
- 2x DW-NAKS-CK12-48L-RC 48" Fixed Length
- 1x DW-NAKS-CK12-NWHA-RC No-Weld Hood Adapter
- 1x DW-NAKS-CK12-FPE:29x29-RC Fan Plate Adapter - End





Vent Diameter	Number of Joints Per 10 oz. Tube
3" - 6"	6.7
8" - 10"	6
11" - 12"	5.3
13" - 16"	4.7
18" - 20"	4
22" - 24"	3.3
26" - 28"	2.7
30" - 32"	2
34" - 36"	1.3
38" - 48"	0.7


	drawn by	model	code	description
	JJR	ALL	J-600	J-600 Sealant

Ø	6	7	8	9	10	11	12	13	14	16
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
lb	1.63	1.78	1.94	2.11	2.27	2.42	2.57	2.73	2.90	3.21

Ø	18	20	22	24	26	28	30	32	34	36
B	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
lb	3.52	3.85	4.16	4.49	4.80	5.13	5.43	5.74	6.07	6.38

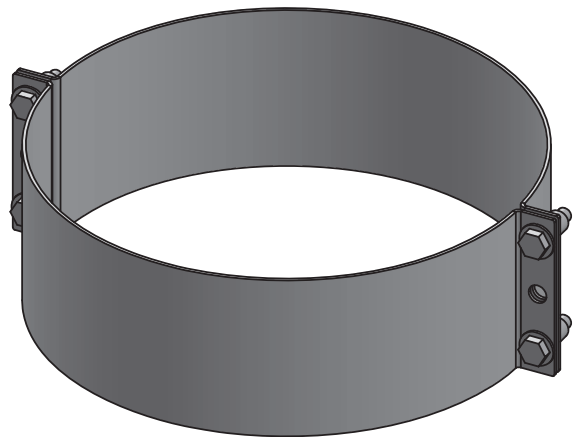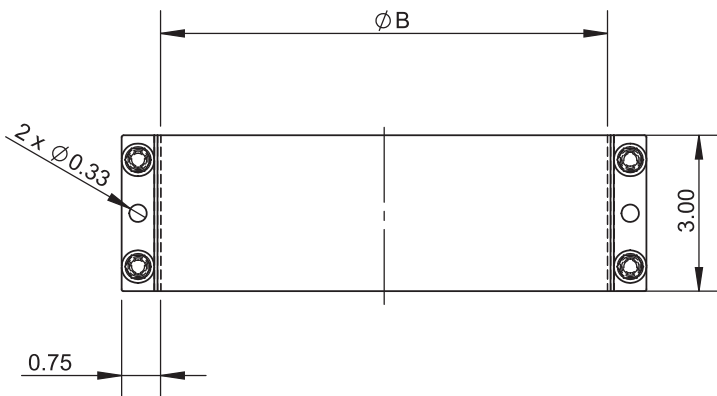


	drawn by	model	code	description
	JJR	DW-NAKS-CK-RC	LSB	DW-NAKS-CKØ-LSB-RC Light Support Band

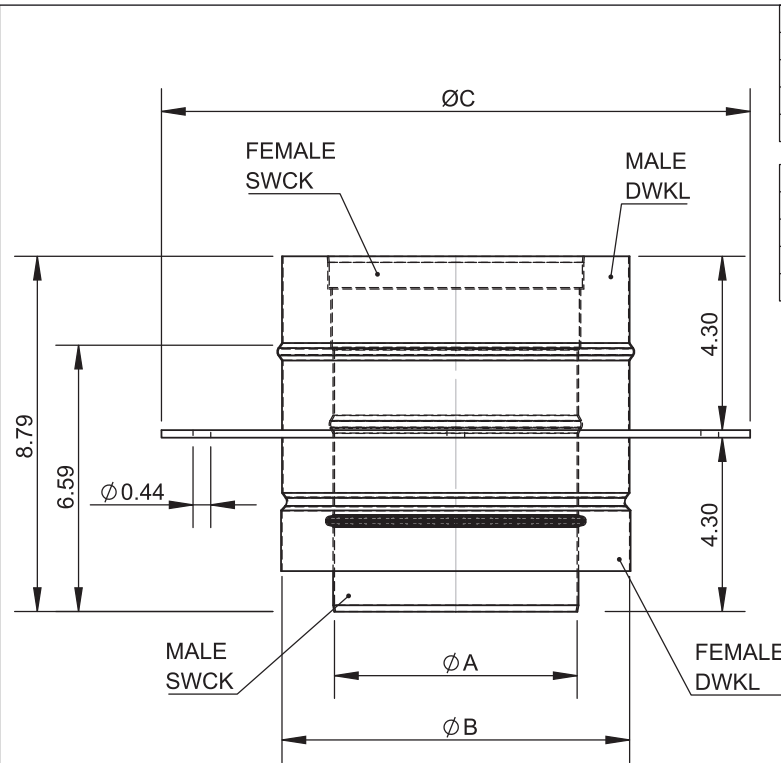


Ø	6	7	8	9	10	11	12	13	14	16
A	6	7	8	9	10	11	12	13	14	16
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
C	14.56	15.56	16.56	17.56	18.56	19.56	20.56	21.56	22.56	24.56
lb	14.39	16.06	17.73	19.45	21.16	22.92	24.62	26.42	28.23	31.94

Ø	18	20	22	24	26	28	30	32	34	36
A	18	20	22	24	26	28	30	32	34	36
B	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
C	26.56	28.56	30.56	32.56	34.56	36.56	38.56	40.56	42.56	44.56
lb	35.71	39.60	43.54	51.44	55.86	60.41	65.01	69.74	74.51	79.44

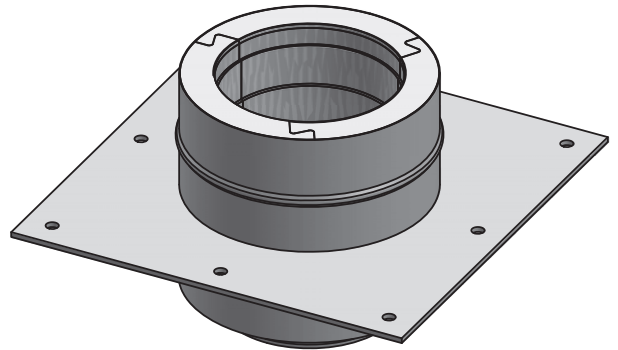


\*INCLUDES 1 LOCKING BAND

drawn by	model	code	description
JJR	DW-NAKS-CK-RC	APS	DW-NAKS-CKØ-APS-RC Anchor Plate Support

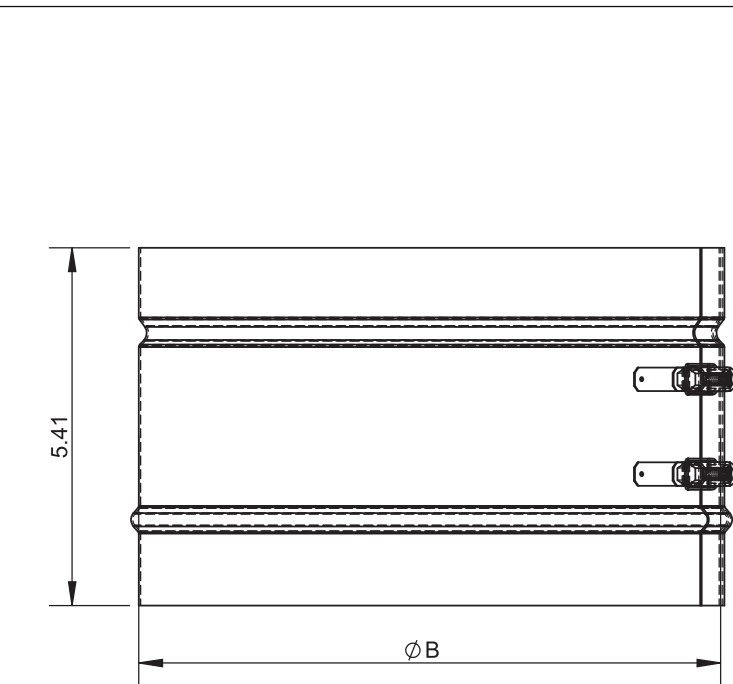


Ø	6	7	8	9	10	11	12	13	14	16
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
lb	1.25	1.39	1.52	1.65	1.76	1.89	2.00	2.16	2.27	2.53

Ø	18	20	22	24	26	28	30	32	34	36
B	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
lb	2.77	3.04	3.26	3.54	3.76	4.05	4.27	4.55	4.77	5.04

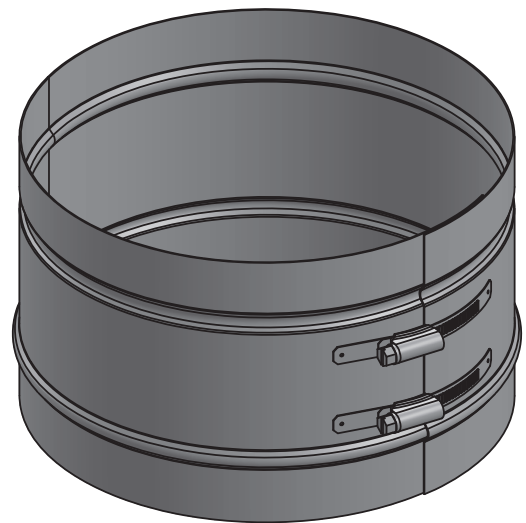

drawn by	model	code	description
JJR	DW-NAKS-CK-RC	LB	DW-NAKS-CKØ-LB-RC Locking Band

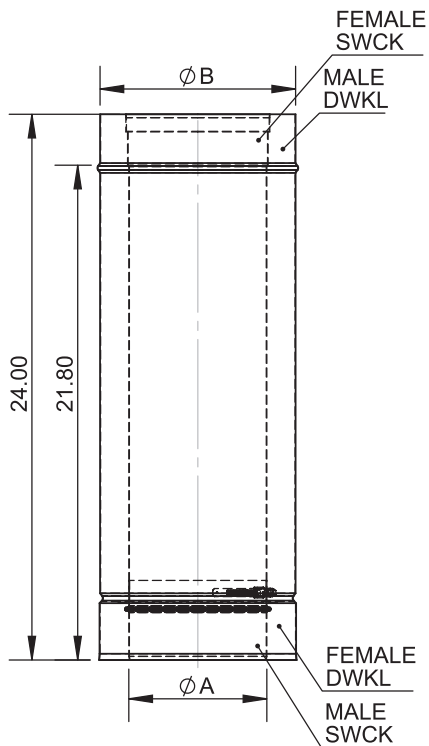

Ø	6	7	8	9	10	11	12	13	14	16
A	6	7	8	9	10	11	12	13	14	16
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
lb	12.52	14.21	15.86	17.53	19.18	20.88	22.53	24.20	25.85	29.19


  

Ø	18	20	22	24	26	28	30	32	34	36
A	18	20	22	24	26	28	30	32	34	36
B	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
lb	32.52	35.86	39.18	53.48	57.66	61.89	66.04	70.27	74.45	78.67



\*FLANGE SUPPORT BAND INCLUDED  
ON SIZED 14" AND ABOVE  
\*INCLUDES 1 LOCKING BAND

drawn by	DAR	model	DW-NAKS-CK-RC	code	24L	description	DW-NAKS-CKØ-24L-RC 24" Fixed Length			
----------	-----	-------	---------------	------	-----	-------------	-------------------------------------	--	--	--

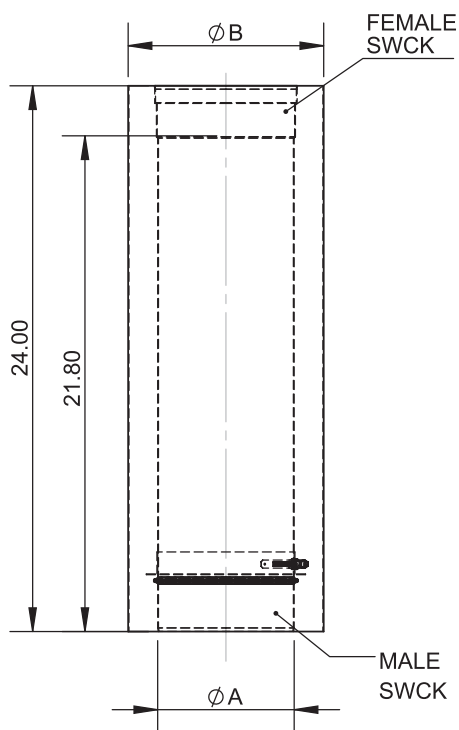

Ø	6	7	8	9	10	11	12	13	14	16
A	6	7	8	9	10	11	12	13	14	16
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
lb	16.76	18.94	21.08	23.25	25.41	27.57	29.72	31.88	34.03	38.37


  

Ø	18	20	22	24	26	28	30	32	34	36
A	18	20	22	24	26	28	30	32	34	36
B	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
lb	42.66	46.99	51.28	72.31	77.88	83.53	89.10	94.75	100.32	105.97



\*FLANGE SUPPORT BAND INCLUDED  
ON SIZES 14" AND ABOVE  
\*INCLUDES 1 CUT LENGTH LOCKING BAND

drawn by	JJR	model	DW-NAKS-CK-RC	code	24CL	description	DW-NAKS-CKØ-24CL-RC 24" Cut Pipe Length			
----------	-----	-------	---------------	------	------	-------------	---	--	--	--

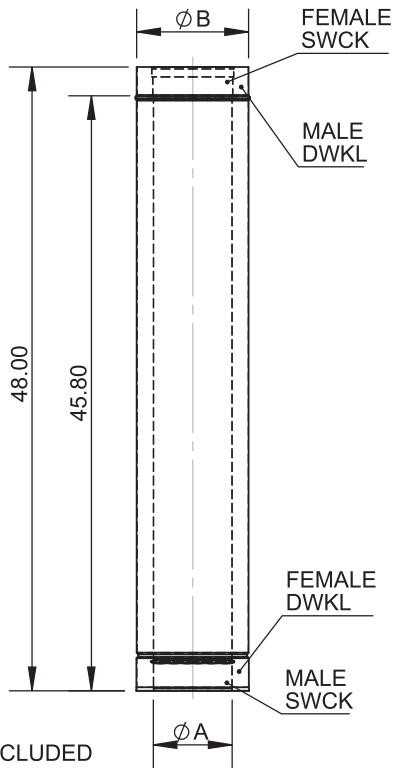

Ø	6	7	8	9	10	11	12
A	6	7	8	9	10	11	12
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5
lb	24.05	27.30	30.54	33.79	37.03	40.28	43.52


Ø	13	14	16	18	20	22	24
A	13	14	16	18	20	22	24
B	15.5	16.5	18.5	20.5	22.5	24.5	26.5
lb	46.77	49.35	56.83	63.32	69.81	76.27	104.54




\*FLANGE SUPPORT BAND INCLUDED ON SIZES 14" AND ABOVE

\*INCLUDES 1 LOCKING BAND

	drawn by	CLS	model	DW-NAKS-CK-RC	code	48L	description	DW-NAKS-CKØ-48L-RC 48" Fixed Length			
--	----------	-----	-------	---------------	------	-----	-------------	-------------------------------------	--	--	--


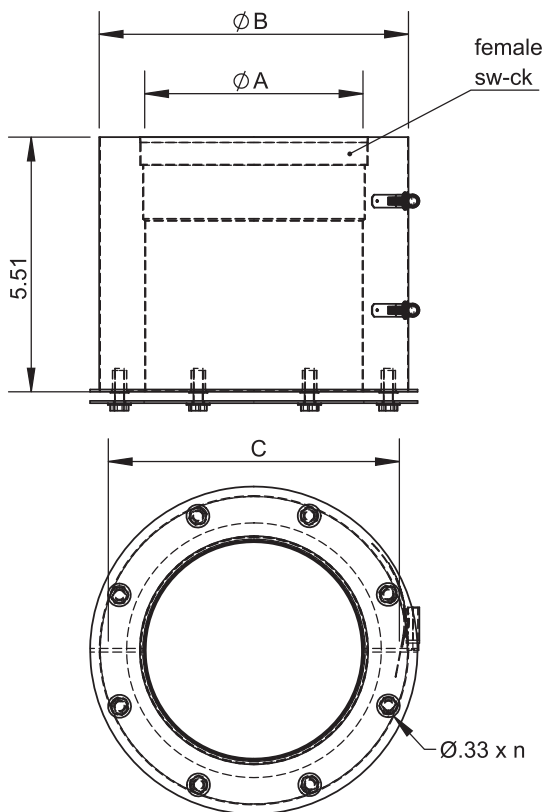


Ø	6	7	8	9	10	11	12				
A	6	7	8	9	10	11	12				
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5				
C	8.07	9.07	10.07	11.07	12.07	13.07	14.07				
n	8			10	10	12	12				
lb	4.97	5.61	6.23	6.93	7.57	8.25	8.89				

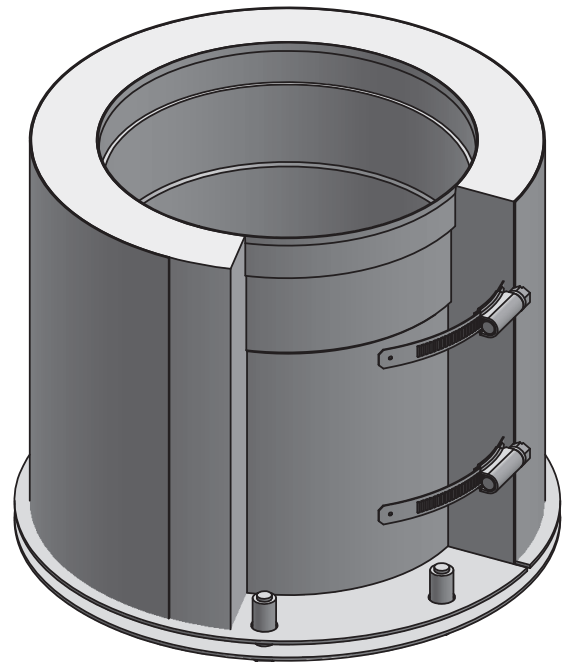

\*INCLUDES 1 FINISHING BAND


	drawn by	JJR	model	DW-NAKS-CK-RC	code	NWHA	description	DW-NAKS-CKØ-NWHA-RC No Weld Hood Adapter - Start			
--	----------	-----	-------	---------------	------	------	-------------	--	--	--	--

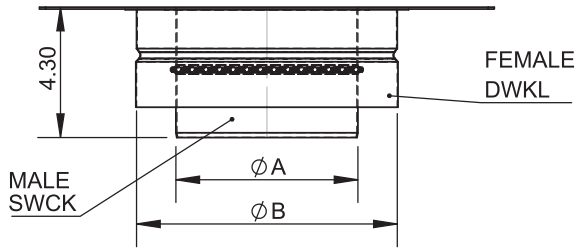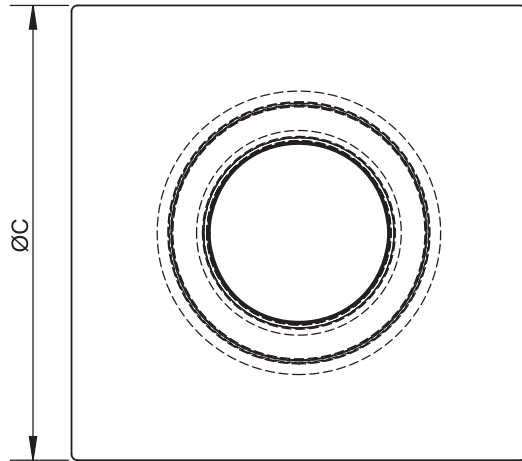

\*INCLUDES 1 LOCKING BAND

Ø	6	7	8	9	10	11	12	13	14	16
A	6	7	8	9	10	11	12	13	14	16
B	8.5	9.5	10.5	11.5	12.5	13.5	14.5	15.5	16.5	18.5
C	29									
lb	17.29	17.47	17.60	17.73	17.82	17.89	17.91	17.93	17.89	17.78

Ø	18	20	22	24	26	28	30	32	34	36
A	18	20	22	24	26	28	30	32	34	36
B	20.5	22.5	24.5	26.5	28.5	30.5	32.5	34.5	36.5	38.5
C	36					42			48	
lb	25.56	25.23	24.75	26.09	33.81	33.18	32.41	41.12	40.11	39.05

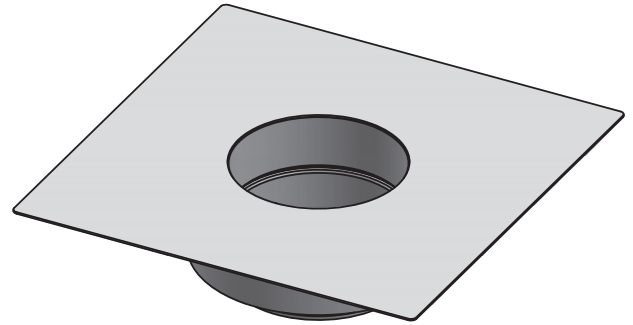

		drawn by JJR	model DW-NAKS-CK-RC	code FPE	description DW-NAKS-CKØ-FPE-RC Fan Plate Adapter - End
--	--	-----------------	------------------------	-------------	---