

SHORT CYCLE MAKEUP AIR WITH NEW IPS (INTERNAL PERFORATED SUPPLY) TECHNOLOGY



IPS (Internal Perforated Supply) slows air to assist in capture and containment





HoodMart's Short Cycle Makeup Air with IPS (Internal Perforated Supply) removes grease laden vapors from the air while replacing air without causing negative air pressure. This allows using a fresh air makeup air fan instead of a costly tempered air unit. IPS (Internal Perforated Supply) takes advantage of the Coanda Effect created inside the hood, further assisting with capture and containment

FEATURES:

- **All hoods are constructed of 18 Gauge 430 Stainless Steel**
- **UL710 hood design has the Lowest CFM per ft for over 700-degree appliances (UL or ETL)**
- **First UL Listed hood that does not require factory cut duct connections**
- **New IPS (Internal Perforated Supply) is manufactured with high quality 304 Stainless Perforated material**
- **Allows for flexibility on supply connections when site is less than ideal**
- **IPS enhances mixing Supply Air into the primary Effluent Air being discharged**



IPS (Internal Perforated Supply) slows air to assist in capture and containment

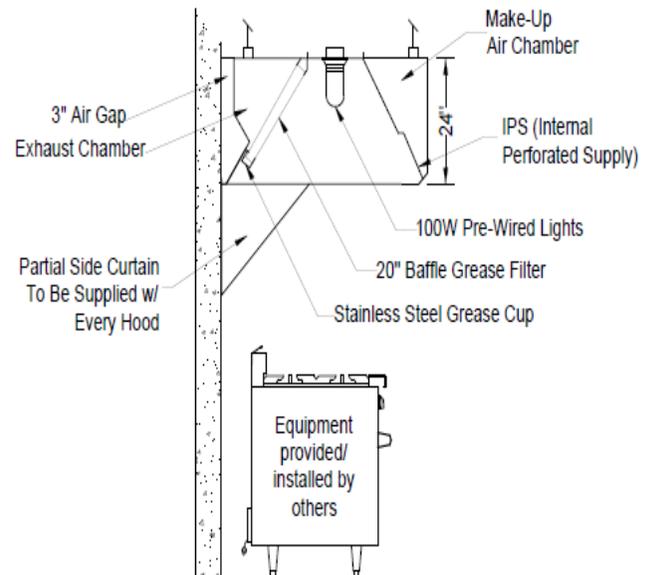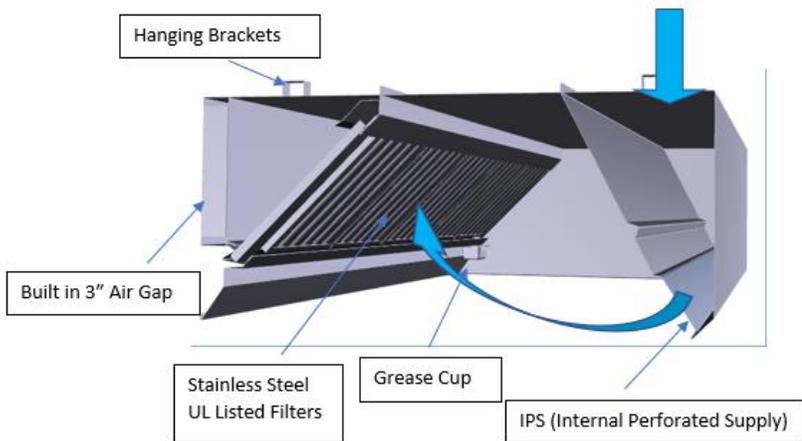

- Optional Equipment:**
- Exhaust and Supply Fans – UL and ETL
 - Mounting Curbs – Flat or Pitched (Wall Mount – check for availability)
 - Fire Suppression System – Listed UL300 (Ansul or Kidde available)
 - Utility Cabinet – Side Mount to hood made with matching stainless steel
 - Ceiling Enclosure - Stainless Steel to cover from top of hood to ceiling

Hood Dimensions		Max Cooking Surface Temp (°F)	Min Exhaust Air Flow (CFM) per Linear Ft.
Hood Widths	Min 30"	400F	150 CFM
Hood Length	Min 3'-0"	600F	200 CFM
Hood Height	18" or 24"	700F	250 CFM
Low Profile (Sloped) Front Hood (Available) Dimension 6" – 24"			

NORTH AMERICAN KITCHEN SOLUTIONS, INC
 172 REASER COURT
 ELYRIA, OH 44035
 TEL: 1.440.365.4567
 E-MAIL: SALES@NAKSINC.COM

