



PTN052L6BE - SUBMITTAL

Project Name:	NAKS – Freezer - Self-Contained	Project Location:	US
Quote ID:		Item #:	2000
Submitted For:		Submitted On:	
Submitted By:		Submitted From:	
Identity #:		Tag:	

For Record

For Approval

By: _____

Date: _____

General Product Information

Product Family:	PTN	Voltage: (Volts/Ph/Hz)	208-230/1/60
Application:	Indoor	Refrigerant Type:	R404A
Temperature Range:	Low Temp	Unit Cooler Motor Type:	EC
Defrost Type:	Electric	Compressor Model:	CF06K6E

Technical Information

Performance Data

Capacity			Unit Cooler CFM	Altitude	AWEF Value
Ambient Temp (°F)	Room Temp (°F)	Capacity (BTU/H)			
95	-10	5,360	900	0	N/A


Electrical Data

MCA	MOPD	Unit Amps
18.1	20	15.3

Unit Specifications

Plug Supplied?	Matching NEMA Receptacle Number	Approx. Net Weight (lbs)
NO	N/A	275

Dimensional Drawing(s)

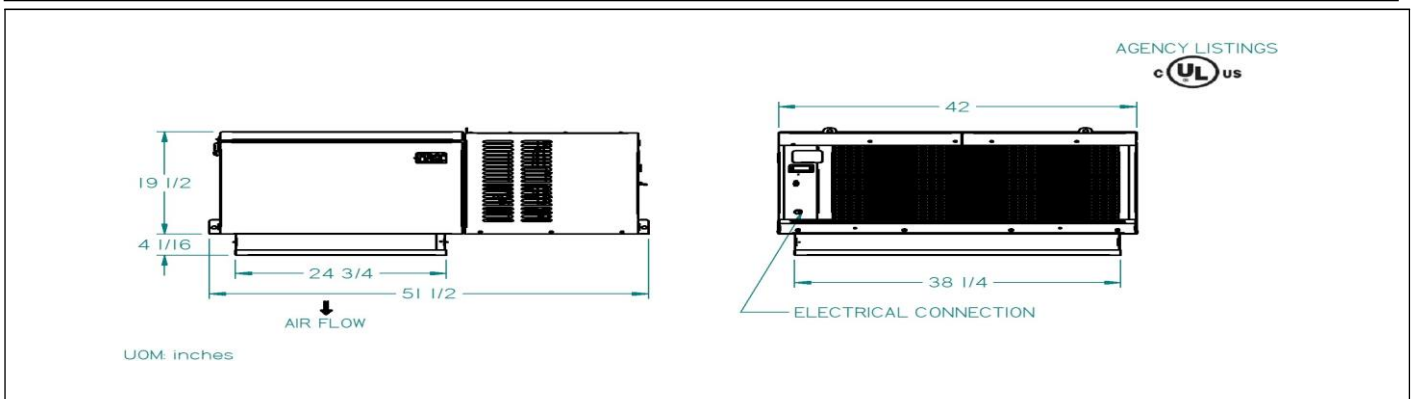



PTN052L6BE - SUBMITTAL

Project Name:	NAKS – Freezer - Self-Contained	Project Location:	US
Quote ID:		Item #:	2000
Submitted For:		Submitted On:	
Submitted By:		Submitted From:	
Identity #:		Tag:	

Standard Features

EASE OF INSTALLATION & SERVICE

- INSTALLATION TAKES A FRACTION OF THE TIME REQUIRED FOR A SPLIT SYSTEM: NO PIPING OR LOOSE COMPONENTS TO INSTALL, REFRIGERANT IS PRE-CHARGED AT FACTORY AND A FIELD SUPERHEAT ADJUSTMENT IS NOT REQUIRED (SEE INSTALLATION MANUAL FOR MORE INFORMATION)
- MAXIMIZES STORAGE AREA IN A COOLER OR FREEZER: EVAPORATOR GRILL MOUNTS FLUSH ON A STANDARD 4 OR A RECESSED 5 1/2 CEILING PANEL
- NO DRAIN LINE REQUIRED ON INDOOR MODELS - COME STANDARD WITH A CONDENSATE EVAPORATION PAN
- OPTIMIZED FOR INDOOR USE.

ENERGY EFFICIENT AND ENVIRONMENTALLY FRIENDLY

- REDUCED REFRIGERANT CHARGE: SYSTEM USES APPROXIMATELY 10 PERCENT OF REFRIGERANT REQUIRED FOR A COMPARABLE SPLIT SYSTEM. RESULTS MAY VARY. ESTIMATES BASED ON A TYPICAL 25-FOOT REFRIGERANT LINE LENGTH.

EASE OF USE

- CONTROLS PRESET FOR TYPICAL APPLICATIONS: +38 F FOR HIGH TEMP. COOLERS, +35 F FOR MEDIUM TEMP. COOLERS, -10 F FOR FREEZERS AND ARE EASY TO ADJUST
- SYSTEM IS FACTORY-ASSEMBLED, EVACUATED, CHARGED, RUN-TESTED AND WIRED; NO ADDITIONAL COMPONENTS OR REFRIGERANT CHARGING REQUIRED

RELIABLE & DURABLE

- ELECTRONIC CONTROL PROVIDES ACCURATE TEMPERATURE CONTROL
- LIQUID-LINE FILTER DRIER (MEDIUM AND LARGE CABINET ONLY)
- TWO-YEAR PARTS WARRANTY

Options

Shipped-Loose Options (Unit)

(QTY)Part Number - Description	(QTY)Part Number - Description
(1) WARCH1-3 - PRO! 1.25-1.9 HP HERMETIC WARRANTY (3YR)	

Minimum Unit Clearances

